

# EVERY WOODEN FLOOR DESERVES THE VERY BEST.



**Alex Jeakins**

T +44 (0)7496282829 // E alexjeakins@lecoluk.com

**Duncan Conlan**

T +44 (0)7534941817 // E duncanconlan@lecoluk.com

**Fraser McArthur**

T +44 (0)7956134481 // E frasermcarthur@lecoluk.com



# EVERY WOODEN FLOOR DESERVES THE VERY BEST.

## EVERYTHING YOU NEED FOR PROFESSIONAL INSTALLATION, FINISHING, RENOVATION AND MAINTENANCE OF WOODEN FLOORS & PARQUET.

Lecol has over 50 years of experience in The Netherlands, Belgium and United Kingdom. We help professionals in the wooden flooring industry to achieve great standards with our high quality products, advice, knowledge and expertise. Whatever your job or type of wooden floor covering is, from pre-treatment, levelling, sanding and gluing to oiling or lacquering and maintenance, we offer a unique and complete system that is a suitable solution for every situation and all wooden floor types.

All of our products work together to offer connected systems that are produced and developed in Germany by WAKOL and LOBA. Like the members of a relay team, each member has a complementary and strengthening effect on each other. Combined with our personal and technical project support (including site visits by appointment), we will help you achieve a perfectly finished floor. We will always look to provide helpful advice and action. No problem is too big, no questions are too ridiculous. We help professionals. No matter what.



### PERSONAL

We are happy to be contacted directly and speak your language as a professional.



### POWERFUL

What we give you is security. We stand by our products and offer you active project support.



### SKILLED

We are highly experienced in the field of floor preparation, installation, renovation, finishing and maintenance.



## HIGH QUALITY PRODUCTS. AWESOME SERVICE.

### LECOL PROVIDES THE ASSURANCE THAT YOUR PROJECT WILL GO TO PLAN.

With our great range of quality products Lecol aims to provide a smooth and reliable realisation of your project.

Our active project support and in-depth knowledge of techniques, products (together they offer connected systems) and applications can contribute to the best possible result. As a customer you will be supported with practical solutions. We are committed to supporting you both personally and technically. If you need an onsite demonstration, you can make an appointment with our representatives and we will show you the best way to work with our products and share our knowledge with your team. Contact us and we will help you!

lecol<sup>R</sup>



# LOBA – WAKOL CONNECTED SYSTEMS.

Top performances need top products that are perfectly matched to each other. With Connected Systems, we offer a solution that represents a guaranteed best possible result. Below we would like to explain why our connected systems offer the assurances you need.



## LOBA

LOBA is a German producer of systems to finish and maintain wooden and cork floors. Product Categories include water based lacquers and primers, oil based finishes, colouring systems, maintenance products and application tools

Well known products include LOBA 2K InvisibleProtect A.T., LOBA EasyPrime, LOBA Viva, LOBA Fusion, LOBA Supra A.T. and LOBA HS 2K ImpactOil.

## WAKOL

Wakol is a German producer of systems for the installation of wooden and cork floors. Product Categories include adhesives, primers, levellers and repair products. Well known products include WAKOL Z 520 Thin Screed, WAKOL PU 280 Polyurethane primer/DPM, WAKOL MS 330 Silane primer/DPM, WAKOL MS 260 hard Elastic parquet & cork adhesive.

These two producers have worked together for more than 20 years and merged 4 years ago.

## WHAT DOES LOBA-WAKOL STAND FOR

- The products of WAKOL and LOBA are designed to be used in conjunction
- This ensures the maximum security during processing
- Chemical reactions between the lacquer/oil and the adhesive are prevented
- Dark joints will be prevented
- It is a guaranteed system using products that are continually tested and verified

## HELP AND ADVICE

If you need help and advice on something that is not covered, please contact us and we will try our best to answer your questions.



## LOBA AND WAKOL CONNECTED SYSTEMS FOR ADHESIVES AND OILS.

CONNECTED  
SYSTEMS

LOBA | LOBASOL

OIL

2K IMPACTOIL

2K IMPACTOIL  
COLOR

AKZENT 100 OIL

HARDWAXOIL  
ECOPLUS

MARKANT

MARKANTCOLOR

MARKANTNATURE

WAKOL

1K PARQUET ADHESIVE

D 1640

D 1690

MS 228

MS 230

MS 232

MS 260

MS 261

MS 262

MS 265

MS 290

MS 292

PU 385

2K PARQUET ADHESIVE

PU 210

PU 215

PU 216

PU 220

PU 225

•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•	
•	•				•	•	•	•	•	•	•	
•	•				•	•	•	•	•	•	•	
•	•							•	•	•	•	•
•	•							•	•	•	•	•
•	•							•	•	•	•	•

•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•

## LOBA AND WAKOL CONNECTED SYSTEMS FOR ADHESIVES AND LACQUERS.

CONNECTED  
SYSTEMS

LOBA | LOBADUR

1K FINISH

EASYFINISH

VIVA

LIFE

2K FINISH

INVISIBLEPROTECT

SUPRA

DUO

FUSION

RUSH

WAKOL

1K PARQUET ADHESIVE

D 1640

D 1690

MS 228

MS 230

MS 232

MS 260

MS 261

MS 262

MS 265

MS 290

MS 292

PU 385

2K PARQUET ADHESIVE

PU 210

PU 215

PU 216

PU 220

PU 225


•	•			•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•

•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•
•	•				•	•	•	•	•	•	
•	•				•	•	•	•	•	•	



# PRODUCTS THAT SCORE WELL FOR SUSTAINABILITY.

Wakol is a German producer of systems for the installation of wooden and cork floors. Product Categories include adhesives, primers, levellers and repair products. Well known products include WAKOL Z 520 Thin Screed, WAKOL PU 280 Polyurethane primer/DPM, WAKOL MS 330 Silane primer/DPM, WAKOL MS 260 hard Elastic parquet & cork adhesive.

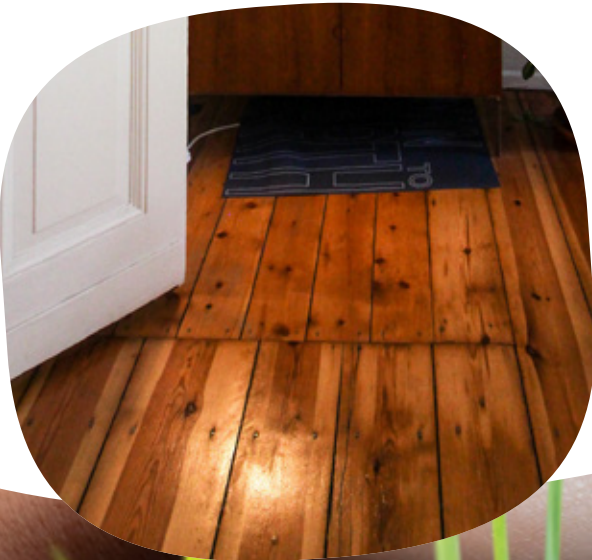







## IMPORTANT ENVIRONMENTAL CHARACTERISTICS

- EMICODE EC1 Plus, very low emission (almost every product)
- Blauer Engel, very low emission (most of the products)
- BREEAM and LEED compliant regarding Volatile Organic Compounds (VOC)
- Water-based fillers
- Solvent-free oil, 100% natural raw materials
- Water-based parquet lacquer, VOC content well below current standard
- 100% solvent-free maintenance products



# INDEX.

PRIMERS	PAG. 5	FOR SOLID WOOD & PARQUET FLOORS	PAG. 10
LEVELLING COMPOUNDS	PAG. 6	FILLERS	PAG. 11
MS ADHESIVES FOR SOLID WOOD & PARQUET FLOORS	PAG. 7	LACQUERS	PAG. 12-14
PU ADHESIVES FOR SOLID WOOD & PARQUET FLOORS	PAG. 8	SOLVENT COLOURS	PAG. 15-16
WATER BASED ADHESIVES FOR SOLID WOOD, CORK & PARQUET FLOORS	PAG. 9	HARD WAX OIL & COLOUR	PAG. 17-19
SOLVENT BASED ADHESIVES		OIL & COLOURS	PAG. 21-23
		MAINTENANCE PRODUCTS	PAG. 25-26
		INSTALLATION ACCESSORIES / ANCILIARIES	PAG. 27-28

# PRIMERS













PRODUCT	DESCRIPTION	CERTI- FICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
<b>WAKOL D 3003 DISPERSION PRIMER</b>	<ul style="list-style-type: none"><li>• Self levelling compound primer for absorbent subfloors</li><li>• Waterbased</li><li>• Ready-to-use</li></ul>		10 KG	DRYING TIME: on cement screeds and concrete following visible drying; on calcium sulphate screed and gypsum fibre boards at least 60 minutes; on cast asphalt and water-resistant adhesive residues after approx. 30-60 minutes	90-140 g	165899
<b>WAKOL D 3045 SPECIAL PRIMER</b>	<ul style="list-style-type: none"><li>• Self levelling compound primer for non-absorbent subfloors like tiles and as an adhesive bridge for Wakol levelling compounds on WAKOL PU280 Polyurethane Primer or WAKOL MS330 Silane Primer</li><li>• Waterbased</li><li>• Ready-to-use</li></ul>		12 KG	DRYING TIME: approx. 30-60 minutes, approx. 60-120 minutes on wooden sheet material	100-150 g	135299
<b>WAKOL D 3055 PARQUET PRIMER</b>	<ul style="list-style-type: none"><li>• Waterbased primer for under Wooden flooring adhesives on absorbant subfloors</li><li>• Quick drying</li><li>• Not suitable as damp proof membrane</li><li>• Non hazardous</li></ul>		10 KG	DRYING TIME: on cement screeds following visible drying approx. 30 minutes, on calcium sulphate concrete and gypsum fibre boards after approx. 2 hours	100-150 g	135007
<b>WAKOL PU 280 POLYURETHANE PRIMER / DPM</b>	<ul style="list-style-type: none"><li>• Quick drying (dry in only 45 min.)</li><li>• Single component polyurethane resin primer</li><li>• Suitable for use as a DPM</li><li>• Strengthens the subfloor</li><li>• Can be used on absorbent and non-absorbent subfloors</li><li>• Solvent and water free</li></ul>	 	5 KG	DRYING TIME: approx. 40-50 minutes	approx. 100-150 g/ m² as primer, approx. 250-350 g/m² as moisture barrier	130761
			11 KG			130762
<b>WAKOL MS 330 MS SILANE PRIMER / DPM</b>	<ul style="list-style-type: none"><li>• Quick drying (dry in only 60 min.)</li><li>• Single component silane primer</li><li>• One coat only DPM</li><li>• Strenghtens the subfloor</li><li>• Can be used on absorbent and non-absorbent subfloors</li><li>• Solvent and water free</li></ul>		5 KG	DRYING TIME: approx. 60 minutes	approx. 80-120 g/m² as primer, approx. 250 g/m² as moisture barrier	150734
			10 KG			147851

# LEVELLING COMPOUNDS

PRODUCT	DESCRIPTION	CERTIFI- CATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
<b>WAKOL Z 520 THIN SCREED, FIBRE REINFORCED</b>	<ul style="list-style-type: none"><li>• Creates an even subfloor 3-40 mm</li><li>• Gives the subfloor absorbent properties</li><li>• Smooths out rough spot</li><li>• Creates the preferred surface for gluing wood floors</li></ul>		22 KG	DRYING TIME: < 5 mm minimum 6 hours	1,8 kg/m²/mm	159390
<b>WAKOL Z 626 LEVELLING COMPOUND</b>	<ul style="list-style-type: none"><li>• Creates an even subfloor 3-20 mm</li><li>• Self flowing</li><li>• Gives the subfloor absorbent properties</li><li>• Smooths out rough spot</li><li>• Creates the preferred surface for gluing wood floors</li></ul>		22 KG	DRYING TIME: < 5 mm minimum 6 hours	1,5 kg/m²/mm	165660



# MS ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

PRODUCT	DESCRIPTION	CERTIFI-CATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
<b>WAKOL MS 228</b> READY-TO-LAY PARQUET ADHESIVE, ELASTIC	<ul style="list-style-type: none"><li>For the installation of multi-layer parquet</li><li>Not in combination with WAKOL PU 280 Polyurethane Primer</li><li>Solvent and water free</li><li>Very good filling properties</li><li>100% solid content</li><li>High initial grab</li><li>No known allergic reactions</li><li>Easy to remove from the floors and hands</li></ul>	  	18 KG	OPEN TIME: approx. 40 minutes	approx. 800-1500 g/m <sup>2</sup> with trowel notch, approx. 1700-1800 g/m <sup>2</sup> with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5	147852
<b>WAKOL MS 230</b> PARQUET ADHESIVE, ELASTIC	<ul style="list-style-type: none"><li>For the installation of multi-layer parquet</li><li>Solvent and water free</li><li>Very good filling properties</li><li>100% solid content</li><li>High initial grab</li><li>No known allergic reactions</li><li>Easy to remove from the floors and hands</li></ul>	  	18 KG	OPEN TIME: approx. 40 minutes	approx. 700-1300 g/m <sup>2</sup> with trowel notch, approx. 1700-1800 g/m <sup>2</sup> with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5	130760
<b>WAKOL MS 260</b> PARQUET ADHESIVE, FIRM-ELASTIC	<ul style="list-style-type: none"><li>For the installation of almost every wooden floor</li><li>Solvent and water free</li><li>Suitable for underfloor heating</li><li>Very good filling properties</li><li>100% solid content</li><li>High initial grab</li><li>No known allergic reactions</li><li>Easy to remove from the floors and hands</li></ul>	  	18 KG	OPEN TIME: approx. 40 minutes	approx. 700-1500 g/m <sup>2</sup> parquet approx. 400-450 g/m <sup>2</sup> cork approx. 1700-1800 g/m <sup>2</sup> with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5	130757
<b>WAKOL MS262</b> PARQUET ADHESIVE, FIRM-ELASTIC, SAUSAGE	<ul style="list-style-type: none"><li>Structure viscous</li><li>Solvent and water free</li><li>Very good filling properties</li><li>100% solid content</li><li>Very high initial grab</li><li>No known allergic reactions</li><li>Easy to remove from the floors and hands</li></ul>	  	600 cc	OPEN TIME: approx. 40 minutes	approx. 450-500 ml/m <sup>2</sup> combining with WAKOL TS 160/TS 170; approx. 600-800 ml/m <sup>2</sup> strip application, approx. 500-950 ml/m <sup>2</sup> with WAKOL Parquet Notched Trowel; approx. 425-850 ml/m <sup>2</sup> WAKOL replaceable Nozzles	145710

# PU ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

PRODUCT	DESCRIPTION	CERTIFI-CATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
<b>WAKOL ADHESIVE PU 225</b>	<ul style="list-style-type: none"><li>Solvent and water free</li><li>Suitable for all types of wood flooring</li><li>Suitable for use with water-borne lacquers</li><li>Very good filling properties</li><li>100% solid content</li><li>Excellent adhesion properties</li><li>Low emission level EC1</li></ul>	 	6,75 KG (A + B Comp)	OPEN TIME: Approx. 50 minutes	approx. 800-1.500 g/m <sup>2</sup>	130759
			8,9 KG (A Comp)			140237
			1,1 KG (B Comp)			140236

# WATER BASED ADHESIVES FOR SOLID WOOD, CORK & PARQUET FLOORS

PRODUCT	DESCRIPTION	CERTIFICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
<b>LECOL ADHESIVE PVAC</b> 	<ul style="list-style-type: none"><li>Water resistant dispersion adhesive D3</li><li>Joint adhesive for floating floors</li></ul>		0,75 KG	OPEN TIME: approx. 5-7 minutes		113333
			1 KG			122504
<b>WAKOL CORK CONTACT ADHESIVE D 3540</b> 	Latex contact adhesive for laying cork tiles according to DIN EN 12104 with non-treated or treated surface on absorbent and non-absorbent subfloors. Also suitable for cork wall coverings and laying carpets on steps. WAKOL D 3540 corresponds to DIN EN 14259.		0,8 KG	OPEN TIME: approx. 120-180 minutes, with pre-coating approx. 60-90 minutes	Minimum 250 g/m² for laying cork, otherwise 150-650 g/m²	126081
			2,5 KG			123553
			5 KG			124454

# DPM IN ONLY 1 LAYER.

Applying a moisture suppressant is sometimes necessary if there is too much moisture in the subfloor and waiting is not an option. You can also opt for extra security and wait for the subfloor to dry naturally. In today's quick moving environment, this is the less likely option. With the WAKOL MS330 Silane Primer the waiting time is reduced to a minimum. You have a moisture barrier in just 1 layer and within 1 hour. As the product is completely free of epoxy and isocyanates it is also a cleaner choice for your project.

### WHY CHOOSE WAKOL MS330 SILANE PRIMER?

- DPM in only 1 layer and dry within 1 hour!
- Free of epoxy and isocyanates, so much healthier to work with
- 1 component = no mixing, no pot life, no waste of material

### PRODUCT APPLICATION.

- Consolidates the sub floor
- Binds old adhesive and plaster residues
- Isolates humidity in sand cement screeds, up to 95% KRL without UFH and 85% KRL with UFH
- After only 1 hour drying, direct installation of wooden floors can be started with a WAKOL MS Parquet Adhesive or
- After only 1 hour drying, self levelling can start with the appropriate WAKOL self levelling compound. Always apply the WAKOL D3045 Special Primer to the surface before the levelling compound is poured.
















# FILLERS


PRODUCT	DESCRIPTION	CERTIFI-CATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
<b>LECOL FILLER 7500</b> 	Solvent based binder • Very fast drying time • Allows sanding after a short period of time • Specifically developed for wooden floors • Easy to use • Quick drying time • Very good filling properties • Very strong adhesion • Water free		0,8 KG	DRYING TIME: approx. 30-60 minutes	100 ml	113314
			5 KG			113315
<b>LOBA EASYFILLPRO</b> 	Waterbased binder. • Easy to work with • Closes even wider joints by one-time application • No subsiding of the filler in the joint • Very fast drying Excellent sandability, clearly visible and low adhesion on sanding paper • Excellent color scheme for oiled and finished surfaces • Applicable to all common European and exotic wood types • Odour neutral		5 L	DRYING TIME: approx. 15 - 30 minutes	100 ml	146102

# LACQUERS

PRODUCT	DESCRIPTION	CERTIFI-CATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	GLOSS LEVEL	ARTICLE NUMBER
<b>LOBA WS EASYPRIME</b> 	Polyurethane-acrylate waterbased primer for roller and trowel application for wooden floors. • Used on millions of m² worldwide every year • All-rounder offering maximum processing reliability • No roller marks • Premium quality at a fair price • Optimised adhesion between wood and finish • Reduces side bonding • Suitable for use with practically all European and exotic woods, as well as in sports and multipurpose halls	  	5 L	DRYING TIME: 60 minutes	100 ml		118329
<b>LOBA PRIMASEAL PLUS</b> 	Alcohol-based primer for wooden floors • Excellent flow properties • No roller marks • Beautiful deep natural colour • Suitable for all wooden floors (universally applicable) • No mixing • Quick drying • Low solvent • No odours • Good price-performance ratio		5 L	DRYING TIME: 40-60 minutes	100 - 120 ml		126256
<b>LOBA 2K INVISIBLEPROTECT AT</b> 	New-generation, waterbased surface protection for parquet and hardwood floors. • This lacquer combines the looks of an oiled surface with the protection and ease of maintenance of a water based lacquer • Natural structure and feel like untreated wooden flooring • Extremely easy to work with • 2-layer full structure without priming • Increased anti-slip properties • No additional polishing required • Excellent chemical resistance • As easy to clean as finished surfaces • No grain accentuation, the original colour of the wood remains as it was in its original state	  	1 KG	DRYING TIME: 4-6 hours	100 - 130 ml		138190
			5 KG				138189
<b>LOBA 2K SUPRA AT</b> 	Ceramic-reinforced waterbased 2-component polyurethane finish for wooden floors. • Fully usable after 24 hours • Sets new standards in quality • Meets highest demands • Extremely high scratch resistance thanks to ceramic components • Qualified for various floorings	 	5 KG	DRYING TIME: 4-6 hours	100 - 120 ml	Semi Gloss	144247
			5 KG			Matt	138190



PRODUCT	DESCRIPTION	CERTIFICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	GLOSS LEVEL	ARTICLE NUMBER
<b>LOBA 2K DUO</b> 	Waterbased 2-component polyurethane finish for wooden floors. <ul style="list-style-type: none"> <li>• Easy and safe application</li> <li>• Excellent wear resistance</li> <li>• Certified anti-slip properties as per BGR 181 for work areas</li> <li>• Available in matt and gloss</li> </ul>	  	5 KG	DRYING TIME: 4-6 hours	100 - 120 ml	Matt	147853
			5 KG			Semi Gloss	136831
<b>LOBA 2K FUSION</b> 	Waterbased 2-component polyurethane finish for wooden floors. <ul style="list-style-type: none"> <li>• Easy and safe application</li> <li>• Excellent wear resistance</li> <li>• Good price/performance ratio</li> <li>• Certified anti-slip properties as per BGR 181 for work areas</li> <li>• Available in matt and semi gloss</li> </ul>	 	5 KG	DRYING TIME: 4-6 hours	100 - 120 ml	Matt	118330
			5 KG			Semi Gloss	143902
<b>LOBA EASYFINISH</b> 	Waterbased 1-component finish for wooden floors. <ul style="list-style-type: none"> <li>• Easy 1K system combined with 2K performance</li> <li>• Outstanding application qualities – easy to use and safe, no lap marks</li> <li>• Very low emission, certified to EMICODE® EC1</li> <li>• Suitable for almost all wood species as well as cork</li> <li>• EasyFinish semi-gloss combined with LOBACARE SportCare meets the requirements for friction according to DIN 18032 for sports floors</li> <li>• Long-lasting beauty of the floor – high resistance to mechanical wear and household chemicals</li> </ul>	 	1 L	DRYING TIME: 4-6 hours	100 - 120 ml	Matt	123640
			5 L			Matt	131911
			5 L			Semi Gloss	165659
<b>LOBA VIVA</b> 	Waterbased 1-component finish for wooden floors. <ul style="list-style-type: none"> <li>• Excellent chemical and abrasion resistance</li> <li>• Very good resistance to black heel marks</li> <li>• Powerful resistance to plasticisers from parquet adhesives</li> <li>• Easy and safe application, no lap marks</li> <li>• Full "Connected Systems" approval</li> <li>• Low VOC content</li> <li>• Very low emission, certified to EMICODE® EC1</li> <li>• Available in matt and semi gloss</li> </ul>	 	5 L	DRYING TIME: 4-6 hours	100 - 120 ml	Matt	118328
			5 L			Semi Gloss	118332

PRODUCT	DESCRIPTION	CERTIFICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	GLOSS LEVEL	ARTICLE NUMBER
<b>LOBA LIFE</b> 	Waterbased 1-component finish for wooden floors. <ul style="list-style-type: none"> <li>• Good price/performance ratio</li> <li>• Balanced properties</li> <li>• High filling capacity</li> <li>• Easy and safe application</li> </ul>	 	5 L	DRYING TIME: 4-6 hours	100 - 120 ml	Semi Gloss	121449
<b>LOBA WHITENER</b> 	Additive for brightening wood surfaces. <ul style="list-style-type: none"> <li>• Creates a smooth brightening of the wood surface</li> <li>• Intensifies the whitening effect of white colored surfaces</li> <li>• Variable control of brightening intensity</li> <li>• May be combined with all waterbased primers and finishes from LOBA</li> <li>• Reduces the natural yellowing of the wood</li> <li>• Provides individual design options</li> <li>• Waterbased technology, solvent-free</li> <li>• Simple and safe application</li> </ul>		80 ML			Matt	149778
<b>LOBA AMBERIZER</b> 	Additive to achieve a color intensification of wood surfaces. <ul style="list-style-type: none"> <li>• May be combined with all waterbased primers and finishes from LOBA</li> <li>• For an aged look with the resistance of a finished surface</li> <li>• Adjustment of newly finished surfaces to solvent-containing finished existing surfaces</li> <li>• Waterbased technology, solvent-free</li> <li>• Simple and safe application</li> </ul>		100 ML			Matt	151904

# SOLVENT COLOURS





**LOBA PROCOLOR**

Stain for wooden floor based on solvents.  
For the professional staining of parquet and  
hardwood floors. Dries reliably and lap-free  
regardless of climatic  
conditions and can be easily varnished over  
with LOBADUR® waterborne finishes.

- Versatile design options
- Simple and safe application
- All variants can be mixed with each other
- Variety of possible combinations





	COLOUR	OPEN TIME / DRYING TIME	CONSUMPTION / M2	CON- TENT	ARTICLE NUMBER
<p>solvents. parquet and d lap-free</p> <p>ished over shes.</p> <p>ach other s</p> <p>rs</p> 	Bilinga	DRYING TIME: 12 hours	25-30 ml	100 ML	145992
	Bilinga			0,75 L	144220
	Black			100 ML	145997
	Black			0,75 L	144080
	Kambala			100 ML	145990
	Kambala			0,75 L	144219
	Mahogany			100 ML	145995
	Mahogany			0,75 L	145833
	Papyrus			100 ML	145987
	Papyrus			0,75 L	144084

PRODUCT	DESCRIPTION
---------	-------------

	COLOUR	OPEN TIME / DRYING TIME	CONSUMPTION / M2	CONTENT	ARTICLE NUMBER
	Smoked Oak			100 ML	144989
	Smoked Oak			0,75 L	144081
	Transparent			0,75 L	144221
	Wenge			100 ML	145994
	Wenge			0,75 L	145831
	White			100 ML	145998
	White			0,75 L	145998




# HARD WAX OIL & COLOURS

PRODUCT	DESCRIPTION	CERTIFICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	GLOSS LEVEL	ARTICLE NUMBER
LOBA MARKANT TRANSPARENT 	<p>High-quality, layer-building oils accentuate the natural look of the wood and at the same time achieve excellent resistance to dirt and water. Transparent:</p> <ul style="list-style-type: none"><li>• Resistant against abrasion</li><li>• Repels dirt and water</li><li>• Deep, natural colour</li><li>• Easy to apply</li><li>• Only two coats necessary</li><li>• Film-forming, wear-resistant</li><li>• Smooth and full bodied appearance</li><li>• Water and dirt resistant</li><li>• Easy and safe application</li><li>• Accentuates the natural beauty of the wood</li><li>• Certified anti-slip properties as per BGR 181 for work areas</li><li>• Suitable for children's toys as per DIN EN 71-3</li></ul>		0,75 L	DRYING TIME: 12 hours	80 ml (roller) 20 ml (roller)	Semi Gloss	119750
			2,5 L			Semi Gloss	118333
			0,75 L			Satin	164201
			2,5 L			Satin	150252
LOBA MARKANT NATURE 	<p>High-quality, natural hardwaxoil. The new formula gives the wood surface an untreated look. Preserves the natural color of the wood.</p> <ul style="list-style-type: none"><li>• Non ambering effect, prevents the natural yellowing of wood</li><li>• Natural look of an untreated floor</li><li>• Smooth and full bodied appearance</li><li>• Water and dirt resistant</li><li>• Easy and safe application</li><li>• Certified anti-slip properties as per DIN 51130 for work areas</li><li>• Suitable for children's toys as per EN 71-3</li></ul> <p>Range of use: Suitable for all light-coloured wood species and for wood surfaces coloured with light MarkantColor colours.</p>		0,75 L	DRYING TIME: 12 hours	60-80ml	Extreme Matt	148380
			2,5 L			Extreme Matt	148739
			0,75 L			Extreme Matt	148739

PRODUCT	DESCRIPTION/COLOUR	COLOUR	CERTIFICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
LOBA MARKANT COLOUR 	<p>High-quality, layer-building oils accentuate the natural look of the wood and at the same time achieve excellent resistance to dirt and water. Colours:</p> <ul style="list-style-type: none"><li>• In 10 deep colours</li><li>• Resistant against abrasion</li><li>• Repels dirt and water</li><li>• Easy to apply</li><li>• Only two coats necessary</li><li>• Film-forming, wear-resistant</li><li>• Smooth and full bodied appearance</li><li>• Water and dirt resistant</li><li>• Easy and safe application</li><li>• Accentuates the natural beauty of the wood</li><li>• Certified anti-slip properties as per BGR 181 for work areas</li><li>• Suitable for children's toys as per DIN EN 71-3</li></ul>				DRYING TIME: 12 hours		
				Antique Oak		0,75 L	165934
				Antique Oak		2,5 L	165745
				Bilinga		0,75 L	144221
				Black		0,75 L	120103
				Black		2,5 L	165746
				Chalk		0,75 L	150251
				Chalk		2,5 L	165747
				Kambala/Iroko		0,75 L	134287
				Mahogany		0,75 L	134286
				Papyrus		0,75 L	122378
				Papyrus		2,5 L	165748
				Pearl		0,75 L	165756













# SOLVENT BASED ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

PRODUCT	DESCRIPTION/COLOUR	COLOUR	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
		Pearl	2,5 L			165749
		Smoked Oak	0,75 L			119323
		Smoked Oak	2,5 L			165750
		Sucupira	0,75 L			134285
		Walnut	0,75 L			165755
		Walnut	2,5 L			165751
		Wenge	0,75 L			119324
		Wenge	2,5 L			165753
		White	0,75 L			119325
		White	2,5 L			165754

PRODUCT	DESCRIPTION	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
LECOL ADHESIVE 5500					
	<ul style="list-style-type: none"><li>• High initial grab</li><li>• Suitable for all types of wooden flooring</li><li>• Very good filling properties</li><li>• Water Free</li></ul>	6 KG	OPEN TIME: approx. 5-10 minutes	Consumption / m2 700-900 g/m²	113311
		16 KG			113313
		25 KG			122489



# OIL & COLOURS

PRODUCT	DESCRIPTION/COLOUR	COLOUR	CERTIFICATIONS	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER	
LOBA PRETONE	Waterborne pigment stain for intensifying the colour under coloured oils <ul style="list-style-type: none"><li>• Water based stain</li><li>• In combination with LOBA HS 2K ImpactOil</li><li>• For beautiful deep colour effects</li><li>• 5 colours available</li><li>• Solvent free</li></ul>		White			2,5 L	139926	
			Brown			2,5 L	139925	
			Black			2,5 L	139928	
			Mocha			2,5 L	147986	
			Steel			2,5 L	147981	
LOBA HS 2K IMPACTOIL	Natural flooring oil for high quality demands in different colours. Accentuates the natural character of the wood and achieves excellent properties. <ul style="list-style-type: none"><li>• One coat impregnation</li><li>• Transparent and 11 colours</li><li>• Natural finish</li><li>• Simple and safe application</li><li>• Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas</li><li>• Time-saving processing in a 1-day system</li><li>• Extremely economical to use</li><li>• 100% solid – solvent-free</li><li>• Certified anti-slip properties as per BGR 181 for work areas</li><li>• Easy and safe application</li><li>• One roller application is sufficient</li><li>• Can be used after only 24 hours</li><li>• Suitable for children's toys as per DIN EN 71-3</li></ul>		Transparent			750 ML	132400	
			Transparent			2,5 KG	139460	
			Antique Oak			100 ML	147121	
			Antique Oak			750 ML	139934	
			Black			100 ML	147122	
			Black			750 ML	139931	
			Chalk			100 ML	147123	
			Chalk			750 ML	139935	
			Clay			100 ML	147124	
			Clay			750 ML	139936	
			Grey			100 ML	147125	
			Grey			750 ML	139937	
			Papyrus			100 ML	147126	
			Papyrus			750 ML	142405	
			Sand			100 ML	147127	
			Sand			750 ML	139939	



DRYING TIME:  
12 hours

60 g

DESCRIPTION/COLOUR	COLOUR	CONTENT	OPEN TIME / DRYING TIME	CONSUMPTION / M2	ARTICLE NUMBER
	Silver	100 ML			147128
	Silver	750 ML			139940
	Smoked Oak	100 ML			147129
	Smoked Oak	750 ML			139933
	Sucupira	100 ML			147130
	Sucupira	750 ML			142406
	Wenge	100 ML			147132
	Wenge	750 ML			147091

# ULTIMATE PROTECTION, INVISIBLY.

**LOBA 2K INVISIBLE PROTECT AT.** Latest-generation, waterborne surface protection for parquet and hardwood floors. For extremely heavy wear. The natural look and feel of the untreated wood is maintained. The virtually invisible layer is also extremely scratch-resistant thanks to the use of the highest-quality raw materials. elastic, excellent chemical and abrasion resistance.

- Natural structure and feel like untreated wooden flooring
- 2 coat system without primer
- Certified non-slip properties as per BGR 181 for work areas
- No polishing effect
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original colour of the wood remains as it was in its original state





**ADDITIVE FOR BRIGHTENING WOOD SURFACES**

LOBA Whitener is an additive that can be added for a smooth brightening of wood floors. The intensity of the whitening may be individually controlled by variable application in one or more layers.










# MAINTENANCE PRODUCTS

PRODUCT	DESCRIPTION	CONTENT	GLOSS LEVEL	ARTICLE NUMBER
<b>LOBA CARECLEANER</b> 	Waterbased wipe care product for floors treated with LOBA 2K InvisibleProtect A.T. <ul style="list-style-type: none"><li>• Can be used universally on various finished floors</li><li>• Extremely economical concentrate</li><li>• Can also be machine applied</li><li>• Clearly visible care effect</li><li>• No basic cleaning required</li></ul>	1 L		138925
<b>LOBA CLEANER</b> 	Day-to-day cleaning for lacquered and oiled floors Highly concentrated, pH-neutral cleaner. <ul style="list-style-type: none"><li>• Excellent cleaning effect thanks to superb dirt-dissolving power</li><li>• Extremely economical concentrate, 1 litre of LOBACARE Cleaner yields up to 200 litres of ready-to-use cleaning solution</li><li>• Material-protecting and pH-neutral</li><li>• Can be used universally for all waterproof surfaces</li><li>• Environmentally friendly biodegradable cleaner</li></ul>	1 L		118892
<b>LOBA CAREREMOVER</b> 	Deep cleaning for lacquered floors Remover for finished floors. <ul style="list-style-type: none"><li>• Removes old layers of care product</li><li>• Removes stubborn dirt</li><li>• Can be used universally on various finished floors</li><li>• Material-protecting and pH-neutral</li></ul>	1 L		118888
<b>LOBA V6 FINISH</b> 	Maintenance for lacquered floors Polyurethane floor care product. <ul style="list-style-type: none"><li>• Particularly wear-resistant, pure PU permanent care product</li><li>• Provides long-term protection against wear</li><li>• Brings new shine to heavily used and worn floors</li><li>• Can be used universally on various finished floors</li><li>• Extremely high scuff-mark resistance</li></ul>	1 L	Matt	118889
		1 L	Gloss	118890

PRODUCT	DESCRIPTION	CONTENT	GLOSS LEVEL	ARTICLE NUMBER
<b>LOBA SPORTCARE</b> 	Maintenance for lacquered sport floors Waterbased floor care product. <ul style="list-style-type: none"><li>• Maintains the floor's value and appearance</li><li>• Provides long-term protection against wear</li><li>• Brings new shine to heavily used and worn floors</li><li>• Prevents scuff marks from shoe soles in the finish</li><li>• Especially safe to walk on</li><li>• Easy and safe application</li></ul>	1 L		120131
<b>LOBA PARKETTCARE</b> 	Maintenance for lacquered floors Waterbased floor care product. <ul style="list-style-type: none"><li>• Maintains the floor's value and appearance</li><li>• Provides long-term protection against wear</li><li>• Can be used without restriction for prefinished wood floors</li><li>• Recommended by leading industrial wood floor manufacturers</li><li>• Brings new shine to heavily used and worn floors</li><li>• Easy and safe application</li></ul>	1 L		118885
<b>LOBA PARKETTOIL</b> 	Maintenance oil solvent-based for oiled floors. <ul style="list-style-type: none"><li>• Refreshes tired and worn floors</li><li>• Removes slight damage in oiled surfaces</li><li>• Ideal for full-surface care or partial improvements</li><li>• Easy and safe application</li><li>• Preserves the anti-slip properties of oiled flooring</li></ul>	1 L		118891
<b>LOBA PARKETTSOAP</b> 	Day-to-day cleaning for oiled and waxed floors Waterbased soap for oiled and waxed floorings. <ul style="list-style-type: none"><li>• Good cleaning effect</li><li>• Care effect</li></ul>	1 L		139461

# INSTALLATION ACCESSORIES / ANCILIARIES

	PRODUCT	DESCRIPTION	CONTENT	ARTICLE NUMBER
	ADHESIVE TROWEL NR. 69		1 piece	113343
	WAKOL AR150 REINFORCEMENT FABRIC	Fibreglass fabric for reinforcing levelling compounds on inhomogeneous subfloors, wood planks and wood product tile sub-floors as well as in sports facility construction in systems with WAKOL D 3060 Plastification Additive and Wakol levelling compound.	50 M2	133819
	WAKOL R4515 TILE CLEANER	Cleaner for manual or machine application on old tiled floors for removal of layers of old care products and extreme dirt before subsequent laying.	5 L	124529
	WAKOL TS102 SOUNDPROOFING MAT (2 MM)	Cork/polyurethane foam matting for improving the footfall soundproofing and heat insulation of flooring structures in old and new buildings. WAKOL TS 102 is suitable as soundproofing material under PVC, CV, textile, linoleum and caoutchouc flooring, as well as mosaic parquet (cubes), on edge lamella, strip, multi-layer parquet, wood block RE/WE, solid wood planks (type of wood oak, max. 16 cm in width) and stratifie flooring indoors.	30 M2	133821
	WAKOL TS160 SLATTED UNDERLAY	Polypropylene soundproofing mat with single-sided aluminium lamination for improving the footfall sound insulation. WAKOL TS 160 Footfall Soundproofing Mat has cut-outs for accommodating WAKOL MS 262 Parquet Adhesive, firm-elastic, and is suitable for laying strip parquet and solid wood planks up to max. 18 cm in width and multi-layer parquet as of 90 cm in length indoors.	15 M2	114767

	PRODUCT	DESCRIPTION	CONTENT	ARTICLE NUMBER
	WAKOL MEASURING BUCKET (+ LID)		11 KG	133829
	WAKOL MIXING BUCKET		30 L	133828
	MANUAL BULKGUN		1 piece	118965
	LOBA ROLLER FOR WATER BASED LACQUERS		1 piece	138784
	LOBA BUCKET FOR LACQUERS		1 piece	142392
	LOBA MIXING JUG FOR LACQUERS		1 piece	118087
	LOBA INLINER BAGS		25 pieces	146837
	LOBA SPRAYMOP	Practical mop with integrated spray system specially developed for the cleaning of parquet, hardwood and cork floors. Fast and easy cleaning, no bucket required.	1 set	144085
	LOBA MOP COVER	Microfibre mop cover for LOBAHOME SprayMop and Mop. Washable at 60°C.	1 single cloth	146188