

# EVERY WOODEN FLOOR DESERVES THE VERY BEST.

EVERYTHING YOU NEED FOR PROFESSIONAL
INSTALLATION, FINISHING, RENOVATION AND
MAINTENANCE OF WOODEN FLOORS & PARQUET.

Lecol has over 50 years of experience in The Netherlands, Belgium and United Kingdom. We help professionals in the wooden flooring industry to achieve great standards with our high quality products, advice, knowledge and expertise. Whatever your job or type of wooden floor covering is, from pre-treatment, levelling, sanding and gluing to oiling or lacquering and maintenance, we offer a unique and complete system that is a suitable solution for every situation and all wooden floor types.

All of our products work together to offer connected systems that are produced and developed in Germany by WAKOL and LOBA. Like the members of a relay team, each member has a complementary and strengthening effect on each other. Combined with our personal and technical project support (including site visits by appointment), we will help you achieve a perfectly finished floor. We will always look to provide helpful advice and action. No problem is too big, no questions are too ridiculous. We help professionals. No matter what.



#### **PERSONAL**

We are happy to be contacted directly and speak you language as a professional.



#### **POWERFUL**

What we give you is security. We stand by our products and offer you active project support.



#### SKILLED

We are highly experienced in the field of floor preparation, installation, renovation, finishing and maintenance





# LOBA – WAKOL CONNECTED SYSTEMS.

Top performances need top products that are perfectly matched to each other. With Connected Systems, we offer a solution that represents a guaranteed best possible result. Below we would like to explain why our connected systems offer the assurances you need.



#### **LOBA**

LOBA is a German producer of systems to finish and maintain wooden and cork floors. Product Categories include water based lacquers and primers, oil based finishes, colouring systems, maintenance products and application tools.

Well known products include LOBA 2K InvisibleProtect, LOBA EasyPrime, LOBA Viva, LOBA 2K Fusion, LOBA 2K Supra A.T. and LOBA 2K ImpactOil.

#### WAKOL

Wakol is a German producer of systems for the installation of wooden and cork floors. Product Categories include adhesives, primers, levellers and repair products. Well known products include WAKOL Z 520 Thin Screed, WAKOL PU 280 Polyurethane primer/DPM, WAKOL MS 330 Silane primer/DPM, WAKOL MS 260 hard Elastic parquet & cork adhesive.

These two producers have worked together for more than 20 years and now they combined forces.

#### WHAT DOES LOBA-WAKOL STAND FOR

- The products of WAKOL and LOBA are designed to be used in conjunction
- This ensures the maximum security during processing
- Chemical reactions between the lacquer/oil and the adhesive are prevented
- Dark joints will be prevented
- It is a guaranteed system using products that are continually tested and verified

#### **HELP AND ADVICE**


If you need help and advice on something that is not covered, please contact us and we will try our best to answer your questions.



#### LOBA AND WAKOL CONNECTED SYSTEMS FOR ADHESIVES AND OILS.



#### **LOBA AND WAKOL CONNECTED SYSTEMS FOR ADHESIVES AND LACQUERS.**

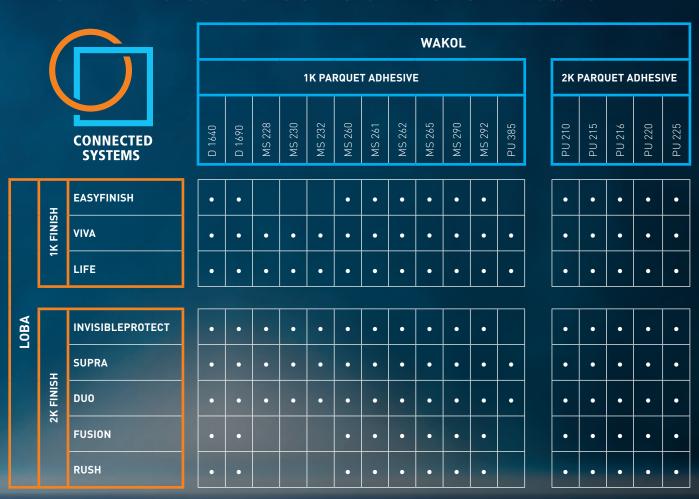

# PRODUCTS THAT SCORE WELL FOR SUSTAINABILITY.

Wakol is a German producer of systems for the installation of wooden and cork floors. Product Categories include adhesives, primers, levellers and repair products. Well known products include WAKOL Z 520 Thin Screed, WAKOL PU 280 Polyurethane primer/ DPM, WAKOL MS 330 Silane primer/DPM, WAKOL MS 260 hard Elastic parquet & cork adhesive.

#### **IMPORTANT ENVIRONMENTAL CHARACTERISTICS**

- EMICODE EC1 Plus, very low emission (almost every product)
- Blauer Engel, very low emission (most of the products)
- BREEAM and LEED compliant regarding Volatile Organic Compounds (VOC)
- · Water-based fillers





# INDEX.

PRIMERS	PAG. 5	FILLERS	PAG. 13
LEVELLING COMPOUNDS	PAG. 6	LACQUERS	PAG. 14-16
MS ADHESIVES FOR SOLID		SOLVENT COLOURS	PAG. 17
WOOD & PARQUET FLOORS	PAG. 7	SOLVENT BASED ADHESIVES FOR SOLID	
PU ADHESIVES FOR SOLID		WOOD & PARQUET FLOORS	PAG. 19
WOOD & PARQUET FLOORS	PAG. 8	HARD WAX OIL & COLOUR	PAG. 21
WATER BASED ADHESIVES FOR SOLID		OIL & COLOURS	PAG. 23-24
WOOD, CORK & PARQUET FLOORS	PAG. 9	MAINTENANCE PRODUCTS	PAG. 25-26
FLOW CHART INSTALLATION	PAG. 11	INSTALLATION ACCESSORIES /	
		ANCILIARIES	PAG. 27-28

### **PRIMERS**

**PRODUCT** 

ARTICLE NUMBER / CONTENT

**DESCRIPTION** 

OPEN / DRYING TIME

CONSUMPTION / M2

CERTIFI-CATES

WAKOL D 3003 DISPERSION PRIMER



• 165899 - 10 KG

• Self levelling compound primer for absorbent subfloors

- Waterbased
- Ready-to-use

DRYING TIME: on cement screeds/ concrete following visible drying; calcium sulphate screed & gypsum fibre boards at least 60 minutes; cast asphalt & water-resistant adhesive residues after approx. 30-60 minutes

90-140 g



WAKOL D 3045 SPECIAL PRIMER



- 166554 6 KG
- 135299 12 KG
- Self levelling compound primer for non-absorbent subfloors like tiles and as an adhesive bridge for Wakol levelling compounds on WAKOL PU280 Polyurethane Primer or WAKOL MS330 Silane Primer
- Waterbased
- Ready-to-use

DRYING TIME: approx. 30-60 minutes, approx. 60-120 minutes on wooden sheet material

100-150 g



WAKOL D 3055 PARQUET PRIMER



• 135007 - 10 KG

- Waterbased primer for under Wooden flooring adhesives on absorbant subfloors
- Quick drying
- Not suitable as damp proof membrane
- Non hazardous

DRYING TIME: on cement screeds following visible drying approx. 30 minutes, on calcium sulphate concrete and gypsum fibre boards after

approx. 2 hours

100-150 g



WAKOL PU 280 POLYURETHANE PRIMER / DPM



- 130761 5 KG
- 130762 11 KG
- Quick drying (dry in only 45 min.)
- Single component polyurethane resin primer
- Suitable for use as a DPM
- Strengthens the subfloor
- Can be used on absorbent and non-absorbent subfloors
- Solvent and water free

DRYING TIME: approx. 40-50 minutes

approx.100-150 g/m² as primer,





WAKOL MS 330 SILANE PRIMER / DPM



- 150734 5 KG
- 147851 10 KG
- Quick drying (dry in only 60 min.)
- Single component silane primer
- One coat only DPM
- Strenghtens the subfloor
- Can be used on absorbent and non-absorbent subfloors
- Solvent and water free

DRYING TIME: approx. 60 minutes

approx. 80-120 g/ m² as primer,

approx. 250 g/ m² as moisture barrier



## LEVELLING COMPOUNDS

**PRODUCT** 

ARTICLE NUMBER / CONTENT

DESCRIPTION

OPEN / DRYING TIME

CONSUMPTION / M2

CERTIFI-CATES

WAKOL Z 520 THIN SCREED, FIBRE REINFORCED



• 159390 - 22 KG

• Creates an even subfloor 3-40 mm

• Gives the subfloor absorbent properties

• Smooths out rough spot

• Creates the preferred surface for gluing wood floors

DRYING TIME: < 5 mm minimum 6

1,8 kg/m²/mm



WAKOL Z 626 LEVELLING COMPOUND



• 165660 - 22 KG

- Creates an even subfloor 3-20 mm
- Self flowing
- Gives the subfloor absorbent properties
- Smooths out rough spot
- Creates the preferred surface for gluing wood floors

DRYING TIME:

< 5 mm minimum 6

1,5 kg/m²/mm



# MS ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

**PRODUCT** 

#### ARTICLE NUMBER / CONTENT

#### DESCRIPTION

#### OPEN / DRYING TIME

#### CONSUMPTION / M2

**CERTIFI-**CATES

**WAKOL MS 228 READY-**TO-LAY, ELASTIC



• 147852 - 18 KG

• For the installation of mulilayer parquet

- Not in combination with WAKOL PU 280 Polyurethane Primer
- Solvent and water free
- Very good filling properties
- 100% solid content
- · High intial grab
- No known allergic reactions
- Easy to remove from the floors and hands

OPEN TIME: approx. 40 minutes approx. 800-1500 g/m² with trowel notch, approx. 1700-1800 g/m<sup>2</sup> with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5





WAKOL MS 230, **ELASTIC** 



• 130760 - 18 KG

For the installation of muli-layer parquet

- Solvent and water free
- Very good filling properties
- 100% solid content
- High intial grab
- No known allergic reactions
- Easy to remove from the floors and hands

OPEN TIME: approx. 40 minutes








**WAKOL MS 260** FIRM-ELASTIC



• 135007 - 18 KG

- · For the installation of almost every wooden floor
- Solvent and water free
- Suitable for underfloorheating
- Very good filling properties
- 100% solid content
- High intial grab
- No known allergic reactions
- Easy to remove from the floors and hands

OPEN TIME: approx. 40 minutes







**WAKOL MS 262** FIRM-ELASTIC, SAUSAGE



• 145710 - 600 cc

- Structure viscous
- Solvent and water free
- Very good filling properties
- 100% solid content
- Very high initinal grab
- No known allergic reactions
- Easy to remove from the floors and

OPEN TIME: approx. 40 minutes аррох. 450-500 ml/m<sup>2</sup> combining with WAKOLTS 160/ TS 170; approx. 600-800 ml/m<sup>2</sup> strip application. approx. 500-950 ml/m² with WAKOL Parquet Notched Trowel; approx. 425-850 ml/m² WAKOL replaceable Nozzles





# PU ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

**PRODUCT** 

**ARTICLE NUMBER /** CONTENT

**OPEN / DRYING** TIME

CONSUMPTION CERTIFI-/ M2

**CATES** 

**WAKOL PU 225 ADHESIVE** 



- 130759 6,75 KG (A+B Compl)
- 140237 8,9 KG (A Compl)
- 140236 1,1 KG (B Compl)
- Solvent and water free

DESCRIPTION

- Suitable for all types of wood flooring
- Suitable for use with waterborne lacquers
- Very good filling properties
- 100% solid content
- Excellent adhesion properties
- Low emission level EC1

OPEN TIME: approx. 50 minutes approx. 800-1.500 g/m<sup>2</sup>



# WATER BASED ADHESIVES FOR SOLID WOOD, CORK & PARQUET FLOORS

**PRODUCT** 

#### **ARTICLE NUMBER /** CONTENT

#### **DESCRIPTION**

**OPEN / DRYING** TIME

CONSUMPTION CERTIFI-/ M2

**CATES** 

**LECOL ADHESIVE PVAC** 



- 113333 0,75 KG
- 122504 1 KG
- Water resistant dispersion adhesive
- Joint adhesive for floating floors

OPEN TIME: approx. 5-7 minutes

WAKOL D 3540, CORK **CONTACT ADHESIVE** 



- 126081 0,8 KG
- 123553 2.5 KG
- 123554 5 KG

Latex contact adhesive for laying cork tiles according to DIN EN 12104 with non-treated or treated surface on absorbent and non-absorbent subfloors. Also suitable for cork wall coverings and laying carpets on steps. WAKOL D 3540 corresponds to DIN EN 14259.

OPEN TIME: approx. 120-180 minutes, with precoating approx. 60-90 minutes

Minimum 250 g/m² for laying cork, otherwise 150-650 g/m<sup>2</sup>



# DPM IN ONLY I LAYER.

Applying a moisture suppressant is sometimes necessary if there is too much moisture in the subfloor and waiting is not an option. You can also opt for extra security and wait for the subfloor to dry naturally. In today's quick moving environment, this is the less likely option. With the WAKOL MS330 Silane Primer the waiting time is reduced to a minimum. You have a moisture barrier in just 1 layer and within 1 hour. As the product is completely free of epoxy and isocyanates it is also a cleaner choice for your project.

#### WHY CHOOSE WAKOL MS330 SILANE PRIMER?

- DPM in only 1 layer and dry within 1 hour!
- Free of epoxy and isocyanates, so much healthier to work with
- 1 component = no mixing, no pot life, no waste of material


#### PRODUCT APPLICATION.

- Consolidates the sub floor
- Binds old adhesive and plaster residues
- Isolates humidity in sand cement screeds, up to 95% KRL without UFH and 85% KRL with UFH
- After only 1 hour drying, direct installation of wooden floors can be started with a WAKOL MS Parquet Adhesive or
- After only 1 hour drying, self levelling can start
  with the appropriate WAKOL self levelling compound.
  Always apply the WAKOL D3045 Special Primer
  to the surface before the levelling
  compound is poured.






## FLOW CHART WOOD FLOORING INSTALLATION UP TO 4 STEPS

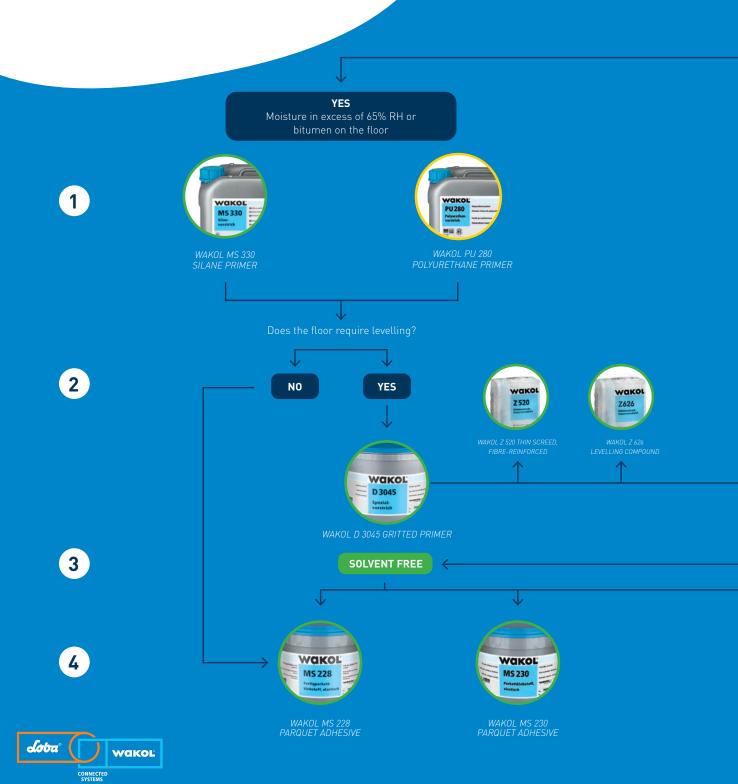

- Identify Your Subfloor type & assess the risk of moisture present?
- Is a 'DPM'' Chemical moisture suppressant required?
- Is the slab pre 1965? Can it be assumed there is no physical DPM?
- Have you performed a moisture test, using reliable and correct methods? (Hygrometer box)
- Are the moisture testing methods in accordance with British Standards 65% RH or below?
- Is the floor solid and stable, no decay, flaky paint, no movement, has laitance been removed?
- Concrete bases 150mm thick often take more than a year to dry from the face only!!

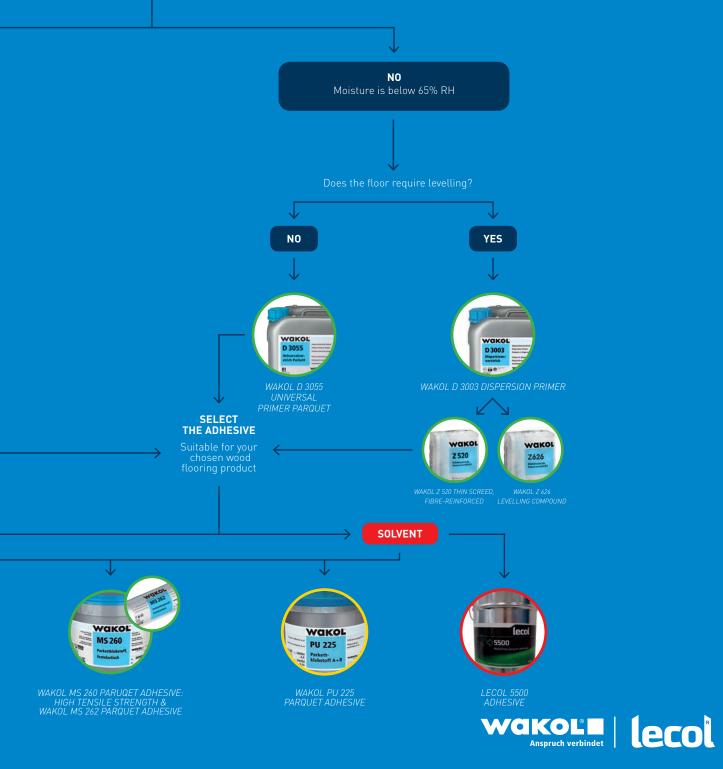

# **FILLERS**

PRODUCT	ARTICLE NUMBER / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFI- CATES
LECOL FILLER 7500					
lecol	• 113314 - 0,8 KG • 113315 - 5 KG	<ul> <li>For the installation of muli-layer parquet</li> <li>Not in combination with WAKOl PU 280 Polyurethane Primer</li> <li>Solvent and water free</li> <li>Very good filling properties</li> <li>100% solid content</li> <li>High intial grab</li> <li>No known allergic reactions</li> <li>Easy to remove from the floors and hands</li> </ul>	DRYING TIME: approx. 30-60 minutes	100 ml	

#### **LOBA EASYFILL**



- Waterbased binder.
- Easy to work with
- Closes even wider joints by one-time application
- No subsiding of the filler in the joint
- Very fast drying Excellent sandability; clearly visible and low adhesion on sanding paper
- Excellent color scheme for oiled and finished surfaces
- Applicable to all common European and exotic wood types
- Odour neutral

DRYING TIME: approx. 15 - 30 100 ml minutes



### **LACQUERS**

**PRODUCT ARTICLE NUMBER / DESCRIPTION OPEN / DRYING** CONSUMPTION **CERTIFI-CONTENT / GLOSS** TIME **CATES** / M2 **LOBA EASYPRIME** Polyurethane-acrylate waterbased primer for roller and trowel application for wooden • Used on millions of m2 worldwide every year • All-rounder offering maximum processing reliability DRYING TIME: • 118329 - 5 L No roller marks 100 ml 60 minutes • Premium quality at a fair price • Optimised adhesion between wood and finish • Reduces side bonding Suitable for use with practically all European and exotic woods, as well as in sports and multipurpose halls **LOBA PRIMASEAL PLUS** Alcohol-based primer for wooden floors • Excellent flow properties No roller marks • Beautiful deep natural colour • Suitable for all wooden floors DRYING TIME: • 126256 - 5 L 100 - 120 ml (universally applicable) 40-60 minutes No mixing

#### LOBA 2K INVISIBLE PROTECT



- 138190 1 KG
- 138189 5 KG

Waterbased surface protection for parquet and hardwood floors.

• Good price-performance ratio

- This lacquer combines the looks of an oiled surface with the protection and ease of maintenance of a water based lacquer.
- Natural structure and feel like untreated wooden flooring
- Extremely easy to work with

Quick dryingLow solventNo odours

- 2-layer full structure without priming
- Increased anti-slip properties
- No additional polishing required
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original colour of the wood remains as it was in its original state

DRYING TIME: 4-6 hours

100 - 130 ml



#### LOBA 2K SUPRA A.T.



- 144247 5 KG Semi Gloss
- 138190 5 KG Matt

Ceramic-reinforced waterbased 2-component polyurethane finish for wooden floors.

- Fully usable after 24 hours
- Sets new standards in quality
- Meets highest demands
- Extremely high scratch resistance thanks to ceramic components
- Qualified for various floorings

DRYING TIME: 4-6 hours

100 - 120 ml



### **LACQUERS**

**PRODUCT** 

#### ARTICLE NUMBER / CONTENT / GLOSS

#### **DESCRIPTION**

#### OPEN / DRYING TIME

#### CONSUMPTION / M2

#### CERTIFI-CATES

**LOBA 2K DUO** 



- 147853 5 KG Matt
- 136831 5 KG Semi Gloss

Waterbased 2-component polyurethane finish for wooden floors.

- Easy and safe application
- Excellent wear resistence
  Certified anti-slip properties as per BGR 181 for work areas
- Available in matt and gloss

DRYING TIME: 4-6 hours

DRYING TIME:

4-6 hours

100 ml



**LOBA 2K FUSION** 



- 118330 5 KG Matt
- 143902 5 KG Semi Gloss

Waterbased 2-component polyurethane finish for wooden floors.

- Easy and safe application
- Excellent wear resistance
- Good price/performance ratio
- Certified anti-slip properties as per BGR 181 for work areas
- Available in matt and semi gloss



100 - 120 ml

#### LOBA EASYFINISH



- 123640 1 L Matt
- 131911 5 L Matt
- 165659 5 L Semi Gloss

Waterbased 1-component finish for wooden floors.

- Easy 1K system combined with 2K performance
- Outstanding application qualities easy to use and safe, no lap marks
- Very low emission, certified to EMICODE® EC1
- Suitable for almost all wood species as well as cork
- EasyFinish semi-gloss combined with LOBA SportCare meets the requirements for friction according to DIN 18032 for sports floors
- Long-lasting beauty of the floor high resistance to mechanical wear and household chemicals"

DRYING TIME: 4-6 hours

100 - 120 ml



**LOBA VIVA** 



- 118328 5 L Matt
- 118332 5 L Semi Gloss

Waterbased 1-component finish for wooden floors.

- Excellent chemical and abrasion resistance
- Very good resistance to black heel marks
- Powerful resistance to plasticisers from parquet adhesives
- Easy and safe application, no lap marks
- Full "Connected Systems" approval
- Low VOC content
- Very low emission, certified to EMICODE® EC1
- Available in matt and semi gloss

DRYING TIME: 100 - 120 ml 4-6 hours



PRODUCT	ARTICLE NUMBER / CONTENT / GLOSS	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2
LOBA LIFE				



• 121449 - 5 L Semi Gloss

Waterbased 1-component finish for wooden floors.

- Good price/performance ratioBalanced properties
- High filling capacity
- Easy and safe application

DRYING TIME: 4-6 hours

100 - 120 ml



**CERTIFI-CATES** 

#### **LOBA WHITENER**



• 149778 - 80 ML Matt

Waterbased 2-component polyurethane finish for wooden floors.

- Easy and safe application
- Excellent wear resistance
- Good price/performance ratio
- Certified anti-slip properties as per BGR 181 for work areas
- Available in matt and semi gloss

100 - 120 ml

#### **LOBA AMBERIZER**



• 151904 - 100 ML Matt

Additive to achieve a color intensification of wood surfaces.

- May be combined with all waterbased primers and finishes from LOBA
- For an aged look with the resistance of a finished surface
- Adjustment of newly finished surfaces to solvent-containing finished existing surfaces
- Waterbased technology, solvent-free
- Simple and safe application

100 - 120 ml

#### **LOBA SLIP RESIST**



• 167624 - 100 ML

Water-based additive for creating a slip-preventing surface of evaluation group R10 on various types of flooring. It's for water-based LOBA sealing products in Matt versions & can be combined with other LOBA Additives.

- Certified slip resistance
- Solvent free
- Simple & safe application
- Simplified storage

100 gr -5 L

# **SOLVENT COLOURS**

PRODUCT ARTICLE NUMBER / DESCRIPTION OPEN / DRYING CONSUMPTION CERTIFICATION OPEN / DRYING CONSUMPTION CERTIFICATION / M2 CATES

**LOBA PROCOLOR** 



100 ML See all article numbers & colours below. Stain for wooden floor based on solvents. For the professional staining of parquet and hardwood floors. Dries reliably and lap-free regardless of climatic conditions and can be easily varnished over with LOBA waterborne finishes.

- Versatile design options
- Simple and safe application
- All variants can be mixed with each other
- Variety of possible combinations

In transparent and 10 deep colours

DRYING TIME: 12 hours

25 - 30 ml

#### **2K PRO COLOURS**

COLOUR	NAME	ARTICLE NUMBER	CONTENT
	Bilinga	145992	100 ml
	Ditiliga	144220	0,75 L
	Black	145997	100 ml
	Didek	144080	0,75 L
	Kambala	145990	100 ml
	Mailibata	144219	0,75 L
	Mahogany	145995	100 ml
THE STREET AND STREET	Manogany	145833	0,75 L
	Papyrus	145987	100 ml
	Papyrus	144084	0,75 L

COLOUR	NAME	ARTICLE NUMBER	CONTENT
	Smoked	144989	100 ml
	Oak	144081	0,75 L
	Transparent	144221	0,75 L
	Wenge	145994	100 ml
		145998	0,75 L
	White	145998	100 ml
	Wille	145998	0,75 L

## **LOBA STAIN**

**PRODUCT ARTICLE NUMBER /** DESCRIPTION OPEN / DRYING CONSUMPTION **CERTIFI-CONTENT / GLOSS** TIME / M2 **CATES LOBA STAIN** Stain is a solvent-based stain for hardwood flooring. Especially created for those who want to pick up the pace. • Reduces the side bonding tendency of water-based finishes • Easy application DRYING TIME: See all article numbers 45-60 ml • Fade resistant through the use of & colours below. special pigments • Soft grain of the wood does not be come darker • Excellent coverage • Compatible with all LOBA water-based

Available in 12 deep colours

#### **STAIN COLOURS**

COLOUR	NAME	ARTICLE NUMBER	CONTENT	COLOUR	NAME	ARTICLE NUMBER	CONTENT
	Weathered Oak	168127	750ml		Jacobean	168123	750ml
	Walnut	166550	750ml		Golden Oak	168126	750ml
	Strong White	166546	750ml		Golden Brown	166547	750ml
					Ebony	166549	750ml
		NE	Λ/Ι		Classic Grey	166548	750ml
•	Stain	27.3			Antique Brown	166545	750 ml
	WALNUTS  Coherence in Autobioentables and Autobiological Autobioentables and Autobioentables and Autobiological Autobiologica				Royal Mahogany	168125	750ml
					Provincial	168124	750ml
750 ml		or shorts shower			Neutral	168128	750 ml

# SOLVENT BASED ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

**PRODUCT** 

**ARTICLE NUMBER / CONTENT / GLOSS** 

**DESCRIPTION** 

**OPEN / DRYING** TIME

CONSUMPTION CERTIFI-/ M2

**CATES** 

**LECOL ADHESIVE 5500** 



- 113311 6 KG
- 113313 16 KG
- 122489 25 KG
- High initial grab
- Suitable for all types of wooden flooring
- Very good filling properties
- Water Free

OPEN TIME: approx. 5-10 minutes

Consumption /m2700-900 g/m<sup>2</sup>

# ULTIMATE PROTECTION, INVISIBLY.

LOBA 2K INVISIBLE PROTECT. Latest-generation, waterborne surface protection for parquet and hardwood floors. For extremely heavy wear. The natural look and feel of the untreated wood is maintained. The virtually invisible layer is also extremely scratch-resistant thanks to the use of the highest-quality raw materials. elastic, excellent chemical and abrasion resistance.

- Natural structure and feel like untreated wooden flooring
- 2 coat system without primer
- Certified non-slip properties as per BGR 181 for work areas
- No polishing effect
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original colour of the wood remains as it was in its original state

#### **ADDITIVE FOR BRIGHTENING WOOD SURFACES**

LOBA Whitener is an additive that can be added for a smooth brightening of wood floors. The intensity of the whitening may be individually controlled by variable application in one or more layers.





### **HARD WAX OIL & COLOURS**

PRODUCT

#### ARTICLE NUMBER / CONTENT / GLOSS

#### DESCRIPTION

#### OPEN / DRYING

#### CONSUMPTION / M2

CERTIFI-CATES

LOBA MARKANT TRANSPARENT

doba"

**larkant** 



- 1183333 2,5 L Semi Gloss
- 164201 0,75 L Satin
- 150252 5 KG Satin

High-quality, layer-building oils accentuate the natural look of the wood and at the same time achieve excellent resistance to dirt and water.

Transparent:

- Resistant against abrasion
- Repels dirt and water
- Deep, natural colour
- Easy to apply
- Only two coats necessary Film-forming, wear-resistant
- Smooth and full bodied appearance
- Water and dirt resistant
- Easy and safe application
- Accentuates the natural beauty of the wood
- Certified anti-slip properties as per BGR 181 for work areas
- Suitable for children's toys as per DIN EN 71-3

DRYING TIME: 12 hours

80 ml (roller) 20 ml (roller)



LOBA MARKANT NATURE



- 148380 0,75 L Extreme Matt
- 148739 2,5 L Extreme Matt

High-quality, natural hardwaxoil. The new formula gives the wood surface an untreated look. Preserves the natural color of the wood.

- Non ambering effect, prevents the natural yellowing of wood
- Natural look of an untreated floor
- Smooth and full bodied appearance
- Water and dirt resistant
- Easy and safe application
- Certified anti-slip properties as per DIN 51130 for work areas
- Suitable for children's toys as per EN 71-3

Range of use: Suitable for all light-coloured wood species and for wood surfaces coloured with light MarkantColor colours.

DRYING TIME: 12 hours

60-80ml



**LOBA MARKANT COLOR** 



See all article numbers, sizes & colours on the next page.

High-quality, layer-building oils accentuate the natural look of the wood and at the same time achieve excellent resistance to dirt and water.

- In 10 deep colours
- Resistant against abrasion
- Repels dirt and water
- Easy to apply
- Only two coats necessary Film-forming, wear-resistant
- Smooth and full bodied appearance
- Water and dirt resistant
- Easy and safe application
- Accentuates the natural beauty of the wood
- Certified anti-slip properties as per BGR 181 for work areas
- Suitable for children's toys as per DIN EN 71-3

DRYING TIME: 12 hours



#### **MARKANT COLOR VARIATIONS**

COLOUR	NAME	ARTICLE NUMBER	CONTENT	COLOUR	NAME	ARTICLE NUMBER	CONTENT
	Antique	165934	0,75 L		Papyrus	122378	0,75 L
	Oak	165745	2,5 L		i apyrus	165748	2,5 L
	Bilinga	144221	0,75 L		Pearl	165756	0,75 L
In his		120103	0,75 L			165749	2,5 L
	Black	165746	2,5 L	2 - 2 - 2 - 2 - 2 - 10 - 10 - 10 - 10 -	Smoked	119323	0,75 L
					Oak	165750	2,5 L
	Chalk	150251	0,75 L	<b>新国教教授</b>	Sucupira	134285	0,75 L
		165747	2,5 L		Sucupira	134263	U,75 L
	Kambala/ Iroko	134287	0,75 L		Walnut	165755	0,75 L
						165751	2,5 L
	Mahogany	134286	0,75 L		Mongo	119324	0,75 L
					Wenge	165753	2,5 L
					White	119325	0,75 L
					vvnite	165754	2,5 L

# OIL & COLOURS

**PRODUCT** 

ARTICLE NUMBER / CONTENT / GLOSS

**DESCRIPTION** 

OPEN / DRYING TIME

CONSUMPTION / M2

CERTIFI-CATES

**LOBA PRETONE** 



2,5 L See all article numbers & colours below. Waterborne pigment stain for intensifying the colour under coloured oils

- Water based stain
- In combination with LOBA 2K ImpactOil
- For beautiful deep colour effects
- 5 colours available
- Solvent free

#### **PRETONE COLOURS**

COLOUR	NAME	ARTICLE NUMBER	CONTENT
	White	139926	2,5 L
	Brown	139925	2,5 L
	Black	139928	2,5 L
	Mocha	147986	2,5 L
	Steel	147981	2,5 L

ARTICLE NUMBER / CONTENT / GLOSS

#### DESCRIPTION

OPEN / DRYING TIME

CONSUMPTION / M2

CERTIFI-CATES

#### LOBA IMPACTOIL COLOR



See all article numbers, sizes & colours below.

Natural flooring oil for high quality demands in different colours. Accentuates the natural character of the wood and achieves excellent properties.

- One coat impregnation
- Transparent and 11 colours
- Natural finish
- Simple and safe application
- Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas
- Time-saving processing in a 1-day system
- Extremely economical to use
- 100% solid solvent-free
- Certified anti-slip properties as per BGR 181 for work areas
- Easy and safe application
- One roller application is sufficient
- Can be used after only 24 hours
- Suitable for children's toys as per DIN EN 71-3

DRYING TIME: 12 hours

60 gr



#### **IMPACTOIL COLOURS**

COLOUR	NAME	ARTICLE NUMBER	CONTENT
		147131	100 ml
	Transparent	132400	750 ml
		139460	2,5 KG
The second second	Antique Oak	147121	100 ml
	Antique Oak	139934	750 ml
	Black	147122	100 ml
	Black	139931	750 ml
	Chalk	147123	100 ml
	Ondit	139935	750 ml
	Clay	147124	100 ml
		139936	750 ml
	Grey	147125	100 ml
	Grey	139937	750 ml

COLOUR	NAME	ARTICLE NUMBER	CONTENT
	Papyrus	147126	100 ml
	Таругаз	142405	750 ml
	Sand	147127	100 ml
	Sallu	139939	750 ml
	Silver	147128	100 ml
	Silver	139940	750 ml
	Smoked	147129	100 ml
	Oak	139933	750 ml
	Sucupira	147130	100 ml
The state of the s	Sucupira	142406	750 ml
	Wenge	147132	100 ml
	wenge	147091	750 ml

# MAINTENANCE PRODUCTS

PRODUCT	ARTICLE NUMBER / CONTENT / GLOSS	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFI- CATES
LOBA REFRESH					
dota	• 138925 - 1 L	Waterbased wipe care product for floors treated with LOBA 2K InvisibleProtect.  • Can be used universally on various finished floors		2	
Refresh	• 130723 - 1 L	Extremely economical concentrate     Can also be machine applied     Clearly visible care effect     No basic cleaning required	n.a.	n.a.	
LOBA CLEANER					
Cleans	• 118892 - 1 L	Day-to-day cleaning for lacquered and oiled floors Highly concentrated, pH-neutral cleaner.  • Excellent cleaning effect thanks to superb dirt-dissolving power  • Extremely economical concentrated, 1 litre of LOBACARE Cleaner yields up to 200 litres of ready-to-use cleaning solution  • Material-protecting and pH-neutral  • Can be used universally for all waterproof surfaces  • Environmentally friendly biodegradable cleaner	n.a.	n.a.	
LOBA CAREREMOVER					
doba Care Remove	• 118888 - 1L	Deep cleaning for lacquered floors Remover for finished floors.  Removes old layers of care product Removes stubborn dirt  Can be used universally on various finished floors  Material-protecting and pH-neutral	n.a.	n.a.	
LOBA PERMANENT					
okoba Sanara Gare	• 118889 - 1L Matt • 118890 - 1L Gloss	Maintenance for lacquered floors Polyurethane floor care product.  Particularly wear-resistant, pure PU permanent care product  Provides long-term protection against wear  Brings new shine to heavily used and worn floors  Can be used universally on various finished floors	n.a.	n.a.	

• Extremely high scuff-mark resistance

PRODUCT	ARTICLE NUMBER / CONTENT / GLOSS	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION CERTIFI- / M2 CATES
LOBA SPORTCARE		Maintenance for lacquered sport floors Waterbased floor care product.		
Sportcan	• 120131 - 1L	<ul> <li>Maintains the floor's value and appearance</li> <li>Provides long-term protection against wear</li> <li>Brings new shine to heavily used and worn floors</li> <li>Prevents scuff marks from shoe soles in the finish</li> <li>Especially safe to walk on</li> <li>Easy and safe application</li> </ul>	n.a.	n.a.
LOBA PARKETTCARE				
Parkett	• 118885 - 1L	Maintenance for lacquered floors Waterbased floor care product.  • Maintains the floor's value and appearance  • Provides long-term protection against wear  • Can be used without restriction for prefinished wood floors  • Recommended by leading industrial wood floor manufacturers  • Brings new shine to heavily used and worn floors  • Easy and safe application	n.a.	n.a.
LOBA PARKETTOIL				
Parketto	• 118891 - 1L	Maintenance oil solvent-based for oiled floors.  Refreshes tired and worn floors Removes slight damage in oiled surfaces Ideal for full-surface care or partial improvements Easy and safe application Preserves the anti-slip properties of oiled flooring	n.a.	n.a.
LOBA PARKETTSOAP				
Parkett Soap	• 139461 - 1L	Day-to-day cleaning for oiled and waxed floors Waterbased soap for oiled and waxed floorings.  • Good cleaning effect • Care effect	n.a.	n.a.

# INSTALLATION ACCESSORIES/ANCILIARIES

**PRODUCT DESCRIPTION ARTICLE** CONTENT NUMBER **ADHESIVE TROWEL** 166802 1 piece WAKOL B11 Fibreglass fabric for reinforcing levelling compounds on inhomo-**WAKOL AR150** geneous subfloors, wood planks and wood product tile subfloors AR 150 REINFORCEMENT 133819 50 M2 as well as in sports facility construction in systems with WAKOL D **FABRIC** 3060 Plastification Additive and Wakol levelling compound. Cleaner for manual or machine application on old tiled floors for WAKOI R4515 124529 removal of layers of old care products and extreme dirt before 5L **TILE CLEANER** wakol subsequent laying. Cork/polyurethane foam matting for improving the footfall soundproofing and heat insulation of flooring structures in old and new **WAKOL TS102** buildings. WAKOL TS 102 is suitable as soundproofing material SOUNDPROOFING 133821 30 M2 under PVC, CV, textile, linoleum and caoutchouc flooring, MAT (2MM) as well as mosaic parquet (cubes), on edge lamella, strip, multi-layer parquet, wood block RE/WE, solid wood planks (type of wood oak, max. 16 cm in width) and stratifie flooring indoors. Polypropylene soundproofing mat with single-sided aluminium lamination for improving the footfall sound insulation. WAKOL TS WAKOL TS160 160 Footfall Soundproofing Mat has cut-outs for accommodating **SLATTED UNDER-**114767 15 M2 WAKOL MS 262 Parquet Adhesive, firm-elastic, and is suitable for laying strip parquet and solid wood planks up to max. 18 cm in width and multi-layer parquet as of 90 cm in length indoors. **WAKOL MEASURING** 133829 11 KG WakoL **BUCKET (+ LID)** 

	PRODUCT	ARTICLE NUMBER	DESCRIPTION	CONTENT
Wakos a	WAKOL MIXING BUCKET	133828		30L
	MANUAL BULKGUN	1118965		1 piece
	LOBA ROLLER FOR WATER-BASED LACQUERS	138784		1 piece
	LOBA BUCKET FOR LACQUERS	142392		1 piece
	LOBA MIXING JUG FOR LACQUERS	118087		1 piece
	LOBA INLINER BAGS	146837		25 pieces
	LOBA SPRAY MOP	144085	Practical mop with integrated spray system specially developed for the cleaning of parquet, hardwood and cork floors. Fast and easy cleaning, no bucket required.	1 set
	LOBA SPRAY MOP COVER	146188	Microfibre mop cover for LOBAHOME SprayMop and Mop. Washable at 60°C.	1 single cloth



#### **Alex Jeakins**

T +44 (0)7496282829 **//** E alexjeakins@lecoluk.com

#### **Duncan Conlan**

T +44 (0)7534941817 // E duncanconlan@lecoluk.com

#### Fraser McArthur

T +44 (0)7956134481 **//** E frasermcarthur@lecoluk.com

Lecol UK // www.lecoluk.com // sales@lecoluk.com

