

EVERY WOODEN FLOOR DESERVES THE VERY BEST.



lecol[®]

EVERY WOODEN FLOOR DESERVES THE VERY BEST.

EVERYTHING YOU NEED FOR PROFESSIONAL INSTALLATION, FINISHING, RENOVATION AND MAINTENANCE OF WOODEN FLOORS & PARQUET.

Lecol has over 55 years of experience in The Netherlands, Belgium and United Kingdom. We help professionals in the wooden flooring industry to achieve great standards with our high quality products, advice, knowledge and expertise. Whatever your job or type of wooden floor covering is, from pre-treatment, levelling, sanding and gluing to oiling or lacquering and maintenance, we offer a unique and complete system that is a suitable solution for every situation and all wooden floor types.

All of our products work together to offer connected systems that are produced and developed in Germany by WAKOL and LOBA. Like the members of a relay team, each member has a complementary and strengthening effect on each other. Combined with our personal and technical project support (including site visits by appointment), we will help you achieve a perfectly finished floor. We will always look to provide helpful advice and action. No problem is too big, no questions are too ridiculous. We help professionals. No matter what.



PERSONAL

We believe in personal contact and are happy to have detailed conversations. Together, we make the difference.



POWERFUL

We offer you assurance and stand firmly behind our products. Active project support is our strength and passion – we're here when you need us.



SKILLED

We are specialists in floor preparation, installation, finishing, and maintenance. We bring years of experience to every project. Our expertise ensures your floor is completed to expectation.





HIGH QUALITY PRODUCTS. AWESOME SERVICE.

**LECOL PROVIDES THE ASSURANCE THAT YOUR
PROJECT WILL GO TO PLAN.**

With our great range of quality products Lecol aims to provide a smooth and reliable realisation of your project.

Our active project support and in-depth knowledge of techniques, products (together they offer connected systems) and applications can contribute to the best possible result. As a customer you will be supported with practical solutions. We are committed to supporting you both personally and technically. If you need an onsite demonstration, you can make an appointment with our representatives and we will show you the best way to work with our products and share our knowledge with your team. Contact us and we will help you!

lecol^R

LOBA – WAKOL CONNECTED SYSTEMS.

Top performances need top products that are perfectly matched to each other. With Connected Systems, we offer a solution that represents a guaranteed best possible result. Below we would like to explain why our connected systems offer the assurances you need.



LOBA

LOBA is a German producer of systems to finish and maintain wooden and cork floors. Product Categories include water based lacquers and primers, oil based finishes, colouring systems, maintenance products and application tools.

Well known products include LOBA 2K InvisibleProtect, LOBA EasyPrime, LOBA Viva, LOBA 2K Fusion, LOBA 2K Supra A.T. and LOBA 2K ImpactOil.

WAKOL

Wakol is a German producer of systems for the installation of wooden and cork floors. Product Categories include adhesives, primers, levellers and repair products. Well known products include WAKOL Z 520 Thin Screed, WAKOL PU 280 Polyurethane primer/DPM, WAKOL MS 330 Silane primer/DPM, WAKOL MS 260 hard Elastic parquet & cork adhesive.

These two producers have worked together for more than 25 years and now they combined forces.

WHAT DOES LOBA-WAKOL STAND FOR

- The products of WAKOL and LOBA are designed to be used in conjunction
- This ensures the maximum security during processing
- Chemical reactions between the lacquer/oil and the adhesive are prevented
- Dark joints will be prevented
- It is a guaranteed system using products that are continually tested and verified

HELP AND ADVICE

If you need help and advice on something that is not covered, please contact us and we will try our best to answer your questions.



LOBA AND WAKOL CONNECTED SYSTEMS FOR ADHESIVES AND OILS.



CONNECTED SYSTEMS

WAKOL																
1K PARQUET ADHESIVE											2K PARQUET ADHESIVE					
D 1640	D 1690	MS 228	MS 230	MS 232	MS 260	MS 261	MS 262	MS 265	MS 290	MS 292	PU 385	PU 210	PU 215	PU 216	PU 220	PU 225

LOBA	OIL	2K IMPACTOIL
		2K IMPACTOIL COLOR
		HARDWAXOIL
		HARDWAXOIL NATURE

•	•	•	•	•	•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•	•	•	•	•					
•	•							•	•	•	•					
•	•							•	•	•	•					

•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•

LOBA AND WAKOL CONNECTED SYSTEMS FOR ADHESIVES AND LACQUERS.



CONNECTED SYSTEMS

WAKOL																
1K PARQUET ADHESIVE											2K PARQUET ADHESIVE					
D 1640	D 1690	MS 228	MS 230	MS 232	MS 260	MS 261	MS 262	MS 265	MS 290	MS 292	PU 385	PU 210	PU 215	PU 216	PU 220	PU 225

LOBA	1K FINISH	EASYFINISH NEO
		VIVA
		SPEED
		LIFE

•	•				•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•

LOBA	2K FINISH	INVISIBLEPROTECT
		SUPRA A.T.
		DUO
		FUSION
		DRIVE

•	•	•	•	•	•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•

PRODUCTS THAT SCORE WELL FOR SUSTAINABILITY.


Our range aligns with leading sustainability standards like BREEAM, LEED, and WELL—ensuring every choice supports healthier indoor spaces and a cleaner environment. With our products great projects don't just look good - they make a difference.

LOBA EASYFINISH NEO: A BREAKTHROUGH IN WOOD FLOOR PROTECTION

This water-based 1K lacquer delivers 2K performance - without the hassle. Easy to apply, highly resistant to wear and chemicals, and made with 35% renewable raw materials. Low in emissions (EMICODE® EC1 Plus), free from PFAS and plasticizers, and 25% lower in CO₂. Smart, sustainable, and powerful.

IMPORTANT ENVIRONMENTAL CHARACTERISTICS

- EMICODE EC1 Plus, very low emission (almost every product)
- Blauer Engel, very low emission (most of the products)
- BREEAM, LEED and WELL compliant regarding Volatile Organic Compounds (VOC) and contributing to a healthier indoor environment
- Water-based fillers
- Solvent-free oil, 100% natural raw materials
- Water-based parquet lacquer, VOC content well below current standard
- 100% solvent-free maintenance products

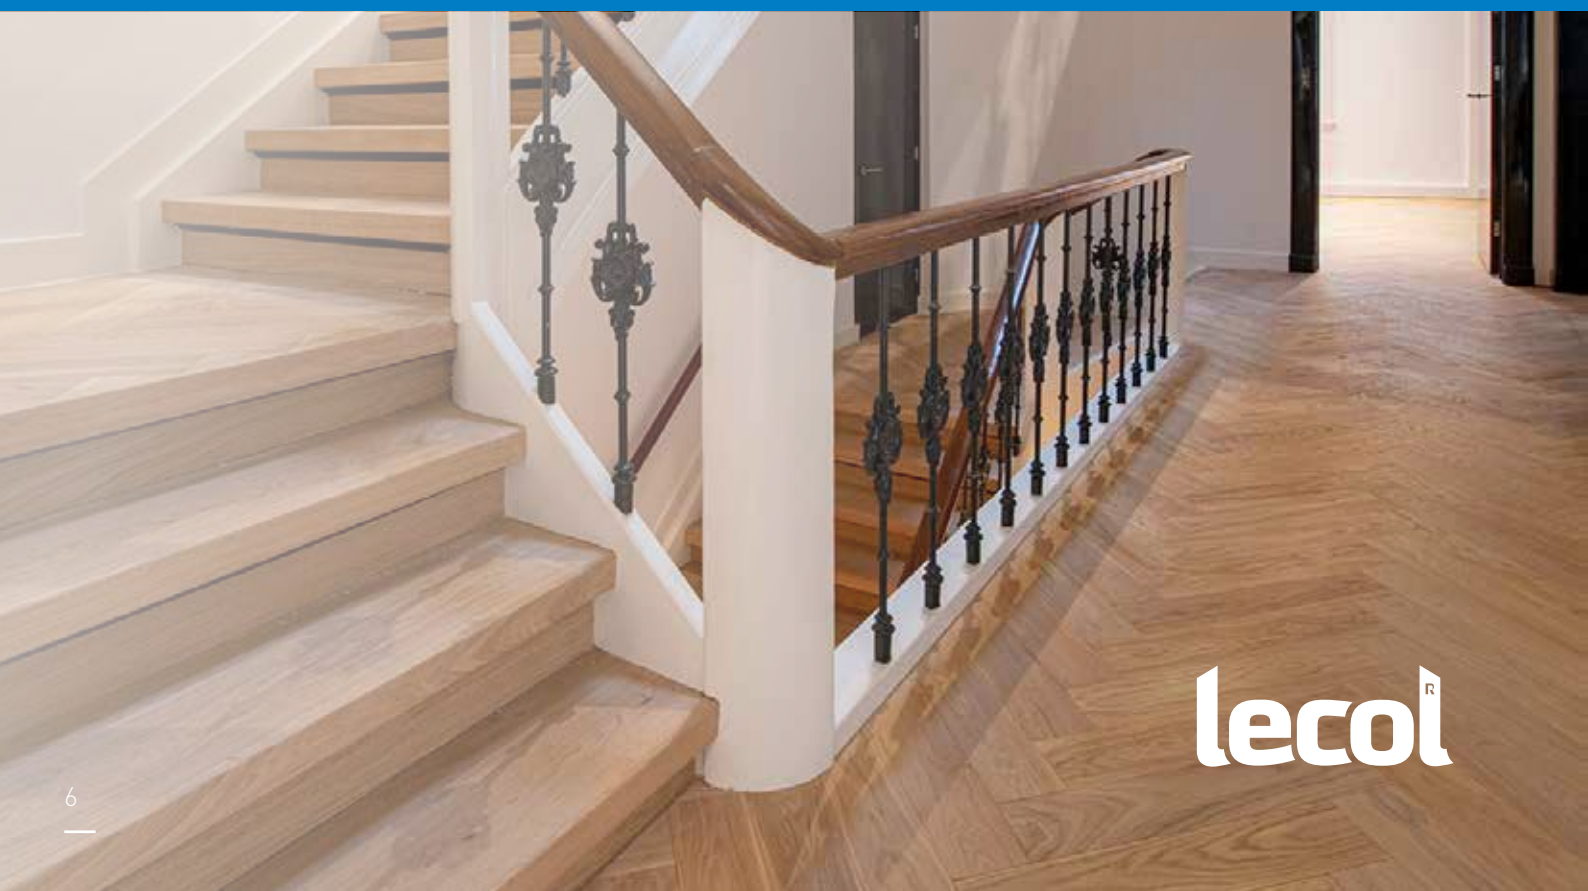












lecol[®]







INDEX.

PRIMERS	PAG. 8	FINISHES	PAG. 19/23
LEVELLING COMPOUNDS	PAG. 9	PRIMERS	19
WOOD & PARQUET FLOORS	PAG. 10/13	FINISHES	19/23
MS ADHESIVES	10	ADDITIVES	23
PU ADHESIVES	11	SOLVENT COLOURS	PAG. 25
WATER BASED ADHESIVES	12	HARD WAX OIL	PAG. 26
SOLVENT BASED ADHESIVES	13	OIL & COLOURS	PAG. 27/28
FLOW CHART INSTALLATION	PAG. 14	MAINTENANCE PRODUCTS	PAG. 29
FILLERS	PAG. 17	INSTALLATION ACCESSORIES / ANCILIARIES	PAG. 30

PRIMERS

















PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 WAKOL D 3003 dispersion primer	165901 - 10 KG	<ul style="list-style-type: none"> • Self levelling compound primer for absorbent subfloors • Waterbased • Ready-to-use 	DRYING TIME: on cement screeds/ concrete following visible drying; calcium sulphate screed & gypsum fibre boards at least 60 minutes; cast asphalt & water-resistant adhesive residues after approx. 30-60 minutes	90-140 g	
 WAKOL D 3045 special primer	167878 - 6 KG 125113 - 12 KG	<ul style="list-style-type: none"> • Self levelling compound primer for non-absorbent subfloors like tiles and as an adhesive bridge for Wakol levelling compounds on WAKOL PU280 Polyurethane Primer or WAKOL MS330 Silane Primer • Waterbased • Ready-to-use 	DRYING TIME: approx. 30-60 minutes, approx. 60-120 minutes on wooden sheet material	100-150 g	
 WAKOL D 3055 parquet primer	135008 - 10 KG	<ul style="list-style-type: none"> • Waterbased primer for under Wooden flooring adhesives on absorbent subfloors • Quick drying • Not suitable as damp proof membrane • Non hazardous 	DRYING TIME: on cement screeds following visible drying approx. 30 minutes, on calcium sulphate concrete and gypsum fibre boards after approx. 2 hours	100-150 g	
 WAKOL PU 280 polyurethane primer / DPM	124166 - 5 KG 122289 - 11 KG	<ul style="list-style-type: none"> • Quick drying (dry in only 45 min.) • Single component polyurethane resin primer • Suitable for use as a DPM • Strengthens the subfloor • Can be used on absorbent and non-absorbent subfloors • Solvent and water free 	DRYING TIME: approx. 40-50 minutes	approx. 100-150 g/m ² as primer, approx. 250-350 g/m ² as moisture barrier	 
 WAKOL MS 330 silane primer / DPM	167877 - 5 KG 147515 - 10 KG	<ul style="list-style-type: none"> • Quick drying (dry in only 60 min.) • Single component silane primer • One coat only DPM • Strengthens the subfloor • Can be used on absorbent and non-absorbent subfloors • Solvent and water free 	DRYING TIME: approx. 60 minutes	approx. 80-120 g/m ² as primer, approx. 250 g/m ² as moisture barrier	

LEVELLING COMPOUNDS



PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 <p>WAKOL Z 520 thin screed, fibre reinforced</p>	159390 - 22 KG	<ul style="list-style-type: none"> • Creates an even subfloor 3-40 mm • Gives the subfloor absorbent properties • Smooths out rough spot • Creates the preferred surface for gluing wood floors 	<p>DRYING TIME: < 5 mm minimum 6 hours</p>	1,8 kg/m ² /mm	
 <p>WAKOL Z 626 levelling compound</p>	165660 - 22 KG	<ul style="list-style-type: none"> • Creates an even subfloor 3-20 mm • Self flowing • Gives the subfloor absorbent properties • Smooths out rough spot • Creates the preferred surface for gluing wood floors 	<p>DRYING TIME: < 5 mm minimum 6 hours</p>	1,5 kg/m ² /mm	






MS ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 <p>WAKOL MS 228 ready-to-lay, elastic</p>	133776 - 18 KG	<ul style="list-style-type: none"> • For the installation of multi-layer parquet • Solvent and water free • Very good filling properties • 100% solid content • High initial grab • No known allergic reactions • Easy to remove from the floors and hands 	OPEN TIME: approx. 40 minutes	approx. 800-1500 g/m ² with trowel notch, approx. 1700-1800 g/m ² with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5	  
 <p>WAKOL MS 230, elastic</p>	127532 - 18 KG	<ul style="list-style-type: none"> • For the installation of multi-layer parquet • Solvent and water free • Very good filling properties • 100% solid content • High initial grab • No known allergic reactions • Easy to remove from the floors and hands 	OPEN TIME: approx. 40 minutes	approx. 700-1300 g/m ² with trowel notch, approx. 1700-1800 g/m ² with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5	  
 <p>WAKOL MS 260 firm-elastic</p>	124504 - 18 KG	<ul style="list-style-type: none"> • For the installation of almost every wooden floor • Solvent and water free • Very good filling properties • 100% solid content • High initial grab • No known allergic reactions • Easy to remove from the floors and hands 	OPEN TIME: approx. 40 minutes	approx. 700-1500 g/m ² parquet approx. 400-450 g/m ² cork approx. 1700-1800 g/m ² with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5	  
 <p>WAKOL MS 232 elastic, sausage</p>	168903 - 600 cc 147098 - 4200 cc	<ul style="list-style-type: none"> • Structure viscous • Solvent and water free • Very good filling properties • 100% solid content • Very high initial grab • No known allergic reactions • Easy to remove from the floors and hands 	OPEN TIME: approx. 40 minutes	approx. 550-725 ml/m ² combining with WAKOL TS 160/TS 170; approx. 600-800 ml/m ² strip application, approx. 500-800 ml/m ² with WAKOL Parquet Nozzles	  

PU ADHESIVES FOR SOLID WOOD & PARQUET FLOORS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 <p>WAKOL PU 225 adhesive</p>	124194 - 6,75 KG (A+B Compl)	<ul style="list-style-type: none"> • Solvent and water free • Suitable for all types of wood flooring 	<p>OPEN TIME: approx. 50 minutes</p>	<p>approx. 800-1.500 g/m²</p>	
	122430 - 8,9 KG (A Compl)	<ul style="list-style-type: none"> • Suitable for use with waterborne lacquers • Very good filling properties 			
	122431 - 1,1 KG (B Compl)	<ul style="list-style-type: none"> • 100% solid content • Excellent adhesion properties • Low emission level EC1 			

WATER BASED ADHESIVES FOR SOLID WOOD, CORK & PARQUET FLOORS


PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LECOP adhesive PVAC	100048 - 0,75 KG	<ul style="list-style-type: none"> Water resistant dispersion adhesive D3 Joint adhesive for floating floors 	OPEN TIME: approx. 5-7 minutes		
 WAKOL D 3540, cork contact adhesive	100033 - 0,8 KG 100034 - 2,5 KG 100035 - 5 KG	Latex contact adhesive for laying cork tiles according to DIN EN 12104 with non-treated or treated surface on absorbent and non-absorbent subfloors. Also suitable for cork wall coverings and laying carpets on steps. WAKOL D 3540 corresponds to DIN EN 14259.	OPEN TIME: approx. 120-180 minutes, with pre-coating approx. 60-90 minutes	Minimum 250 g/m ² for laying cork, otherwise 150-650 g/m ²	

SOLVENT BASED ADHESIVES FOR SOLID WOOD & PARQUET FLOORS



PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	OPEN / DRYING TIME	CONSUMPTION / M2	CERTIFICATES
LECOL adhesive 5500	156558 - 6 KG	<ul style="list-style-type: none">• High initial grab	OPEN TIME: approx. 5-10 minutes	700-900 g/m ²	
	156554 - 16 KG	<ul style="list-style-type: none">• Suitable for all types of wooden flooring			
	156557 - 25 KG	<ul style="list-style-type: none">• Very good filling properties• Water Free			

FLOW CHART WOOD FLOORING INSTALLATION UP TO 4 STEPS

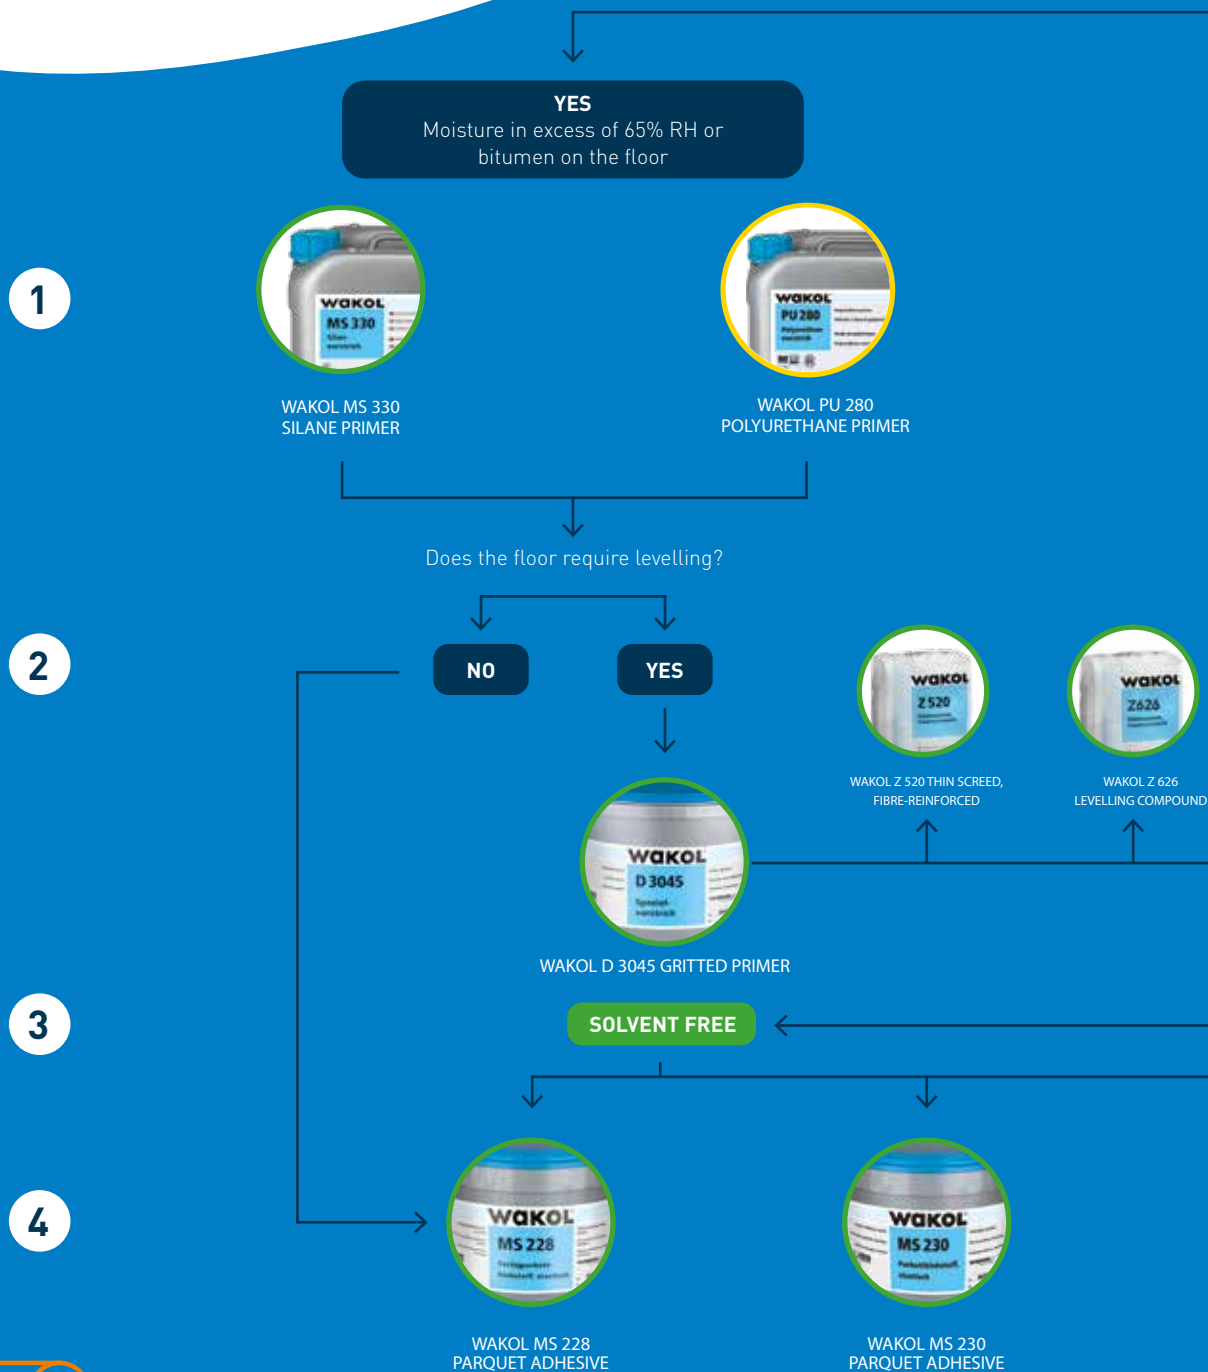

- Identify Your Subfloor type & assess the risk of moisture present?
- Is a 'DPM' Chemical moisture suppressant required?
- Is the slab pre 1965? Can it be assumed there is no physical DPM?
- Have you performed a moisture test, using reliable and correct methods? (Hygrometer box)
- Are the moisture testing methods in accordance with British Standards 65% RH or below?
- Is the floor solid and stable, no decay, flaky paint, no movement, has laitance been removed?
- Concrete bases 150mm thick often take more than a year to dry from the face only!!

NO
Moisture is below 65% RH

Does the floor require levelling?

NO

YES



WAKOL D 3055
UNIVERSAL
PRIMER PARQUET



WAKOL D 3003 DISPERSION PRIMER



WAKOL Z 520 THIN SCREED,
FIBRE-REINFORCED



WAKOL Z 626
LEVELLING COMPOUND

SELECT THE ADHESIVE

Suitable for your chosen wood flooring product

SOLVENT



WAKOL MS 260 PARQUET ADHESIVE:
HIGH TENSILE STRENGTH &
WAKOL MS 262 PARQUET ADHESIVE



WAKOL PU 225
PARQUET ADHESIVE



LECOL 5500
ADHESIVE

wakol | Anspruch verbindet

lecol [®]

DPM IN ONLY 1 LAYER.

Applying a moisture suppressant is sometimes necessary if there is too much moisture in the subfloor and waiting is not an option. You can also opt for extra security and wait for the subfloor to dry naturally. In today's quick moving environment, this is the less likely option. With the WAKOL MS330 Silane Primer the waiting time is reduced to a minimum. You have a moisture barrier in just 1 layer and within 1 hour. As the product is completely free of epoxy and isocyanates it is also a cleaner choice for your project.

WHY CHOOSE WAKOL MS330 SILANE PRIMER?




- DPM in only 1 layer and dry within 1 hour!
- Free of epoxy and isocyanates, so much healthier to work with
- 1 component = no mixing, no pot life, no waste of material

PRODUCT APPLICATION.

- Consolidates the sub floor
- Binds old adhesive and plaster residues
- Isolates humidity in sand cement screeds, up to 95% KRL without UFH and 85% KRL with UFH
- After only 1 hour drying, direct installation of wooden floors can be started with a WAKOL MS Parquet Adhesive or
- After only 1 hour drying, self levelling can start with the appropriate WAKOL self levelling compound. Always apply the WAKOL D3045 Special Primer to the surface before the levelling compound is poured.



FILLERS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 <p>LECOL Filler 7500</p>	<p>156626 - 0,8 KG</p> <p>156555 - 5 KG</p>	<ul style="list-style-type: none"> • Solvent based binder • Very fast drying time • Allows sanding after a short period of time • Specifically developed for wooden floors • Easy to use • Quick drying time • Very good filling properties • Very strong adhesion • Water free 	<p>DRYING TIME: approx. 30-60 minutes</p>	<p>100 ml</p>	
 <p>LOBA Easyfill</p>	<p>146029 - 5 L</p>	<ul style="list-style-type: none"> • Waterbased binder. • Easy to work with • Closes even wider joints by one-time application • No subsiding of the filler in the joint • Fast drying Excellent sandability; clearly visible and low adhesion on sanding paper • Excellent color scheme for oiled and finished surfaces • Applicable to all common European and exotic wood types • Odour neutral 	<p>DRYING TIME: approx. 15-30 minutes</p>	<p>100 ml</p>	

ULTIMATE PROTECTION, INVISIBLY.

LOBA 2K INVISIBLE PROTECT. Latest-generation, waterborne surface protection for parquet and hardwood floors. For extremely heavy wear. The natural look and feel of the untreated wood is maintained. The virtually invisible layer is also extremely scratch-resistant thanks to the use of the highest-quality raw materials. elastic, excellent chemical and abrasion resistance.

- Natural structure and feel like untreated wooden flooring
- 2 coat system without primer
- Certified non-slip properties as per BGR 181 for work areas
- No polishing effect
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original colour of the wood remains as it was in its original state






ADDITIVE FOR BRIGHTENING WOOD SURFACES

LOBA Whitener is an additive that can be added for a smooth brightening of wood floors. The intensity of the whitening may be individually controlled by variable application in one or more layers.







lecol[®]

PRIMERS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA Easyprime	133523 - 5 L	<p>Polyurethane-acrylate waterbased primer for roller and trowel application for wooden floors.</p> <ul style="list-style-type: none"> • Used on millions of m² worldwide every year • All-rounder offering maximum processing reliability • No roller marks • Premium quality at a fair price • Optimised adhesion between wood and finish • Reduces side bonding • Suitable for use with practically all European and exotic woods, as well as in sports and multipurpose halls 	DRYING TIME: 60 minutes	100 ml	  
 LOBA Primaseal plus	156556 - 5 L	<p>Alcohol-based primer for wooden floors</p> <ul style="list-style-type: none"> • Excellent flow properties • No roller marks • Beautiful deep natural colour • Suitable for all wooden floors (universally applicable) • No mixing • Quick drying • Low solvent • No odours • Good price-performance ratio 	DRYING TIME: 40-60 minutes	100 - 120 ml	

FINISHES

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA 2K Invisible Protect	137273 - 1 KG 137274 - 5 KG	<p>Waterbased surface protection for parquet and hardwood floors.</p> <ul style="list-style-type: none"> • This lacquer combines the looks of an oiled surface with the protection and ease of maintenance of a water based lacquer. • Natural structure and feel like untreated wooden flooring • Extremely easy to work with • 2-layer full structure without priming • Increased anti-slip properties • Certified anti-slip properties as per DIN EN 16165:2021-12 R10 • Excellent chemical resistance • As easy to clean as finished surfaces • No grain accentuation, the original colour of the wood remains as it was in its original state • R10 - Slip preventing • Low VOC content • Very low emission, certified to EMICODE® EC1plus • Stresslevel: 9 	DRYING TIME: 4-6 hours	100 - 130 ml	  



LOBA finishes

LOBA is your specialist for the surface treatment of parquet and other wooden floors. Developed by specialists for specialists, you have come to the right place for high-quality, environmentally friendly products for your floor finish!



The absolute top!

LOBA 2K Invisible Protect

- Extreme matt, best invisible effect
- Very strong
- Only two coats needed (no primer required)
- Fast system
- Easy application

STRESS LEVEL.



The sustainable choice!

LOBA EasyFinish Neo

- 1K finish with 2K quality
- Strong
- Friendly for people and the environment
- Easy application

STRESS LEVEL.



Good price/quality ratio!
























LOBA Speed

- Ultra fast system
- Only two coats needed (no primer required)
- Cost effective
- High solid build with very easy application

STRESS LEVEL.



FINISHES

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 <p>LOBA 2K Supra a.t.</p>	123946 - 5 KG Semi Gloss	The strongest lacquer available. Ceramic-reinforced water-based 2-component polyurethane finish for wooden floors. <ul style="list-style-type: none"> Fully usable after 24 hours Sets new standards in quality Meets highest demands Extremely high scratch resistance thanks to ceramic components Qualified for various floorings Stresslevel: 10  <p>living commercial extreme</p>	DRYING TIME: 4-6 hours	100 - 120 ml	 
	135511 - 5 KG Matt				
 <p>LOBA 2K Duo</p>	135501 - 5 KG Matt	Waterbased 2-component polyurethane finish for wooden floors. <ul style="list-style-type: none"> Easy and safe application Excellent wear resistance Certified anti-slip properties as per BGR 181 for work areas Available in matt and gloss Stresslevel: 9  <p>living commercial extreme</p>	DRYING TIME: 4-6 hours	100 - 120 ml	 
	135502 - 5 KG Semi Gloss				
 <p>LOBA 2K Fusion</p>	133521 - 5 KG Matt	Waterbased 2-component polyurethane finish for wooden floors. <ul style="list-style-type: none"> Easy and safe application Excellent wear resistance Good price/performance ratio Certified anti-slip properties as per BGR 181 for work areas Available in matt and semi gloss Stresslevel: 8  <p>living commercial extreme</p>	DRYING TIME: 4-6 hours	100 - 120 ml	 
	135501 - 5 KG Semi Gloss				
 <p>LOBA 2K Drive</p>	169932 - 5 KG Extra Matt	Waterbased 2-component polyurethane finish for wooden floors. <ul style="list-style-type: none"> Easy and safe application Excellent wear resistance Good price/performance ratio Available in extra matt Stresslevel: 6  <p>living commercial extreme</p>	DRYING TIME: 4 - 6 hours	100 - 120 ml	
 <p>LOBA EasyFinish Neo</p>	174428 - 5 L Matt	Waterbased 1-component finish for wooden floors <ul style="list-style-type: none"> Easy 1 component system with 2 component performance Outstanding application qualities easy to use and safe, no lap marks Suitable for almost all wood species as well as cork EasyFinish NEO combined with LOBA Sport Care meets the requirements for friction according to DIN 18032 for sport floors Long lasting beauty of the floor, high resistance to mechanical wear and household chemicals 35% Based on renewable raw materials 25% CO₂ reduction compared to the industry standard Low VOC content Very low emission, certified to EMICODE® EC1plus Stresslevel: 7  <p>living commercial extreme</p>	DRYING TIME: 4 - 6 hours	100 - 120 ml	 
	174427 - 5 L Semi Gloss				
 <p>LOBA Speed</p>	175970 - 5 L Matt	Waterbased 1 component finish for wooden floors <ul style="list-style-type: none"> Very fast system with only 2 coats, without primers, high solid content Very easy to use Coat thickness similar to a 3 coat system Intensifies the wood color Low VOC content Very low emission, certified to EMICODE® EC1plus Stresslevel: 6  <p>living commercial extreme</p>	DRYING TIME: 4-6 hours	100 - 120 ml	 
175971 - 5 L Semi Gloss					

SAFETY FIRST WITH LOBA SLIP RESIST.

LOBA Slip Resist; a water based additive which creates an anti-slip surface (classification R10 on different floortypes). The product is easy to combine with LOBA 2K lacquers and can be combined with other LOBA additives as well. Adding LOBA SlipResist guarantees a layer with a certified R10 anti-slip level without having an effect on the high quality of the lacquer. Also the reason why SlipResist is very suitable for different types of surfaces.

SlipResist is applicable on all surfaces that need an anti-slip prevention level of R10, such as; bathrooms, restaurants, pubs, lunchrooms, entrances, stairs, kitchens, etc.







WHY PROFESSIONALS CHOOSE FOR SLIP RESIST.

- R10 Anti-Slip certification
- Wet PTV values between 37 and 51 are possible
- All qualities of finishing products are maintained after adding SlipResist, such as gloss degree and stress level.
- Solvent free
- Easy and safe to use
- Can be combined with other LOBA additives
- Easy to store






lecol[®]

FINISHES

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA Viva	150088 - 5 L Matt 150087 - 5 L Semi Gloss	Waterbased 1-component finish for wooden floors. <ul style="list-style-type: none"> • Excellent chemical and abrasion resistance • Very good resistance to black heel marks • Powerful resistance to plasticisers from parquet adhesives • Easy and safe application, no lap marks • Full "Connected Systems" approval • Low VOC content • Very low emission, certified to EMICODE® EC1 • Available in matt and semi gloss • Stresslevel: 5  <p>living commercial extreme</p>	DRYING TIME: 4 - 6 hours	100 -120 ml	
 LOBA Life	167879 - 5 L Semi Gloss	Waterbased 1-component finish for wooden floors. <ul style="list-style-type: none"> • Good price/performance ratio • Balanced properties • High filling capacity • Easy and safe application • Low VOC content • Very low emission, certified to EMICODE® EC1plus • Stresslevel: 5  <p>living commercial extreme</p>	DRYING TIME: 4 - 6 hours	100 -120 ml	

ADDITIVES

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA Whitener	149780 - 80 ML	Additive for brightening wood surfaces. <ul style="list-style-type: none"> • Creates a smooth brightening of the wood surface • Intensifies the whitening effect of white colored surfaces • Variable control of brightening intensity • May be combined with all waterbased primers and finishes from LOBA • Reduces the natural yellowing of the wood • Provides individual design options • Waterbased technology, solvent-free 		80 ml - 5L	
 LOBA Amberizer	150735 - 100 ML	Additive to achieve a color intensification of wood surfaces. <ul style="list-style-type: none"> • May be combined with all waterbased primers and finishes from LOBA • For an aged look with the resistance of a finished surface • Adjustment of newly finished surfaces to solvent-containing finished existing surfaces • Waterbased technology, solvent-free • Simple and safe application 		100 ml - 5L	
 LOBA Slipresist	167645 - 100 ML	Water-based additive for creating a slip-preventing surface of evaluation group R10 on various types of flooring. R11 when combined with LOBA 2K Invisible Protect. Wet PTV values between 37 and 51 are possible. It's for water-based LOBA sealing products & can be combined with other LOBA Additives. <ul style="list-style-type: none"> • Certified slip resistance • Solvent free • Simple & safe application • Simplified storage 		100 ml - 5L	

LOBA STAIN DOES THE JOB QUICKLY.

FOR THE PROFESSIONAL COLOURING OF WOOD FLOORS. **NEW COLOURS!**

- Solvent-based & easy to apply.
- Excellent coverage & compatible with almost all LOBA water-based finishes.
- Drying time approx. 2 hours.

Strong White



Classic Grey



Dark Grey



Ebony



Golden Oak



Nutmeg



Provincial



Walnut



Medium Brown



Heritage Brown



Jacobean



Mahogany




SCAN FOR
MORE INFO
OR VISIT
LECOLUK.COM TO
BOOK A DEMO.















Loba[®]
On Top!

lecol[®]

SOLVENT COLOURS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA Stain See all article numbers & colours below.	750 ML	Stain is a solvent-based stain for hardwood flooring. Especially created for those who want to pick up the pace.	DRYING TIME: 2 hours	45 -60 ml	
	<ul style="list-style-type: none"> • Solvent based • Reduces the side bonding tendency of water-based finishes • Easy application • Very fast drying • Fade resistant through the use of special pigments • Soft grain of the wood does not become darker • Excellent coverage • Compatible with all LOBA water-based finishes Available in 12 deep colours				



LOBA Stain	COLOUR	NAME	ARTICLE NR.	CONTENT	COLOUR	NAME	ARTICLE NR.	CONTENT
		Classic Grey	167898 170061	750ml 100ml		Jacobean	168916 170070	750ml 100ml
		Strong White	167896 178940	750ml 100ml		Mahagony	170011 170064	750ml 100ml
		Dark Grey	170010 170063	750ml 100ml		Medium Brown	170048 170067	750ml 100ml
		Ebony	167899 170092	750ml 100ml		Nutmeg	170049 170069	750ml 100ml
		Golden Oak	168919 170071	750ml 100ml		Provincial	168917 170091	750ml 100ml
		Heritage Brown	170012 170065	750ml 100ml		Walnut	167900 170068	750ml 100ml





LOBA Stain sample box, all colors
 Art.nr. 171936
 12 x 100 ml



LOBA Stain sample bundle, 12 colors
 Art.nr. 172021



HARD WAX OILS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 <p>LOBA Hardwax</p>	<p>Matt:</p> <p>171145 - 2,5 L 169978 - 750 ML 174430 - 100 ML</p>	<p>High-quality, layer-forming hard wax oil accentuating the natural look of the wood and at the same time achieve excellent resistance to dirt and water.</p> <ul style="list-style-type: none"> • Resistant against abrasion • Repels dirt and water • Suitable for partial repairs • Natural, velvety feel • Water and dirt resistant • Easy and safe application • Certified anti-slip class R10. • Suitable for children's toys as per DIN EN 71-3 	<p>DRYING TIME: 8 hours</p>	<p>60-80ml (roller)</p>	
	<p>Semi Gloss:</p> <p>174434 - 2,5 L 174433 - 750 ML 174432 - 100 ML</p>				
 <p>LOBA Hardwax oil nature</p>	<p>174431 - 100 ML 169979 - 750 ML 171137 - 2,5 L</p>	<p>High-quality, layer-forming hard wax oil that preserves the natural beauty and feel of untreated raw wood. It's durable, slip resistant and protects against dirt and water.</p> <ul style="list-style-type: none"> • Resistant against abrasion • Repels dirt and water • Suitable for partial repairs • Natural, velvety feel • Dirt resistant, easy to clean surface • Easy and safe application • Certified anti-slip class R10. • Suitable for children's toys as per DIN EN 71-3 	<p>DRYING TIME: 8 hours</p>	<p>60-80ml (roller)</p>	

OIL & COLOURS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
---------	-----------------------	-------------	-------------	------------------	--------------



LOBA Pretone

2,5 L
See all article numbers & colours below.

Waterborne pigment stain for intensifying the colour under coloured oils






- Water based stain
- In combination with LOBA 2K ImpactOil
- For beautiful deep colour effects
- 5 colours available
- Solvent free

DRYING TIME:
12 hours

100-120ml





LOBA Pretone




COLOUR	NAME	ARTICLE NR.	CONTENT	COLOUR	NAME	ARTICLE NR.	CONTENT
	White	137310	2,5 L		Mocha	146830	2,5 L
	Brown	139737	2,5 L		Steel	146831	2,5 L
	Black	139736	2,5 L				



OIL & COLOURS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA Impactoil Color	See all article numbers, sizes & colours below.	<p>Natural flooring oil for high quality demands in different colours. Accentuates the natural character of the wood and achieves excellent properties.</p> <ul style="list-style-type: none"> • One coat impregnation • Transparent and 11 colours • Natural finish • Simple and safe application • Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas • Time-saving processing in a 1-day system • Extremely economical to use • 100% solid – solvent-free • Certified anti-slip properties as per BGR 181 for work areas • Easy and safe application • One roller application is sufficient • Can be used after only 24 hours • Suitable for children's toys as per DIN EN 71-3 	DRYING TIME: 12 hours	60 gr	




LOBA Impactoil Color	COLOUR	NAME	ARTICLE NR.	CONTENT	COLOUR	NAME	ARTICLE NR.	CONTENT
		Transparent	167949	100ml		Papyrus	167944	100ml
			123446	750ml			123464	750ml
			122298	2,5kg				
		Antique	167939	100ml		Sand	167945	100ml
			134358	750ml			134353	750ml
		Black	167940	100ml		Silver	167946	100ml
			125101	750ml			134355	750ml
		Chalk	167941	100ml		Smoked Oak	167947	100ml
			134357	750ml			125102	750ml
		Clay	167942	100ml		Sucupira	167948	100ml
			134352	750ml			125102	750ml
	Grey	167943	100ml		Wenge	167950	100ml	
		134356	750ml			125108	750ml	

MAINTENANCE PRODUCTS

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	DRYING TIME	CONSUMPTION / M2	CERTIFICATES
 LOBA Cleaner	156684 - 1 L	Day-to-day cleaning for lacquered and oiled floors Highly concentrated, pH-neutral cleaner. <ul style="list-style-type: none"> • Excellent cleaning effect thanks to superb dirt-dissolving power • Extremely economical concentrated, 1 litre of LobaCare Cleaner yields up to 200 litres of ready-to-use cleaning solution • Material-protecting and pH-neutral • Can be used universally for all waterproof surfaces • Environmentally friendly biodegradable cleaner 	n.a.	n.a.	
 LOBA CareRemover	161695 - 1 L	Deep cleaning for lacquered floors Remover for finished floors. <ul style="list-style-type: none"> • Removes old layers of care product • Removes stubborn dirt • Can be used universally on various finished floors • Material-protecting and pH-neutral 	n.a.	n.a.	
 LOBA Permanent Care	167951 - 1L Matt 167952 - 1L Gloss	Maintenance for lacquered floors Polyurethane floor care product. <ul style="list-style-type: none"> • Particularly wear-resistant, pure PU permanent care product • Provides long-term protection against wear • Brings new shine to heavily used and worn floors • Can be used universally on various finished floors • Extremely high scuff-mark resistance 	n.a.	n.a.	
 LOBA SportCare	168913 - 1L	Maintenance for lacquered sport floors Waterbased floor care product. <ul style="list-style-type: none"> • Maintains the floor's value and appearance • Provides long-term protection against wear • Brings new shine to heavily used and worn floors • Prevents scuff marks from shoe soles in the finish • Especially safe to walk on • Easy and safe application 	n.a.	n.a.	
 LOBA ParkettCare	150171 - 1L	Maintenance for lacquered floors Waterbased floor care product. <ul style="list-style-type: none"> • Maintains the floor's value and appearance • Provides long-term protection against wear • Can be used without restriction for prefinished wood floors • Recommended by leading industrial wood floor manufacturers • Brings new shine to heavily used and worn floors • Easy and safe application 	n.a.	n.a.	
 LOBA ParkettOil	156683 - 1L	Maintenance oil solvent-based for oiled floors. <ul style="list-style-type: none"> • Refreshes tired and worn floors • Removes slight damage in oiled surfaces • Ideal for full-surface care or partial improvements • Easy and safe application • Preserves the anti-slip properties of oiled flooring 	n.a.	n.a.	
 LOBA ParkettSoap	156682 - 1L	Day-to-day cleaning for oiled and waxed floors Waterbased soap for oiled and waxed floorings. <ul style="list-style-type: none"> • Good cleaning effect • Care effect 	n.a.	n.a.	

INSTALLATION ACCESSORIES/ANCILIARIES

PRODUCT	ARTICLE NR. / CONTENT	DESCRIPTION	CONTENT
 Adhesive trowel WAKOL B11	144006	Notched trowel according to TKB to apply WAKO Parquet adhesives.	1 piece
 WAKOL AR150 reinforcement fabric	124209	Fibreglass fabric for reinforcing levelling compounds on inhomogeneous subfloors, wood planks and wood product tile subfloors as well as in sports facility construction in systems with WAKOL D 3060 Plastification Additive and Wakol levelling compound.	50 M2
 WAKOL R4515 tile cleaner	121365	Cleaner for manual or machine application on old tiled floors for removal of layers of old care products and extreme dirt before subsequent laying.	5L
 WAKOL TS102 soundproofing mat (2mm)	132993	Cork/polyurethane foam matting for improving the footfall soundproofing and heat insulation of flooring structures in old and new buildings. WAKOL TS 102 is suitable as soundproofing material under PVC, CV, textile, linoleum and caoutchouc flooring, as well as mosaic parquet (cubes), on edge lamella, strip, multi-layer parquet, wood block RE/WE, solid wood planks (type of wood oak, max. 16 cm in width) and stratified flooring indoors.	30 M2
 WAKOL TS160 slatted underlay	124208	Polypropylene soundproofing mat with single-sided aluminium lamination for improving the footfall sound insulation. WAKOL TS 160 Footfall Soundproofing Mat has cut-outs for accommodating WAKOL MS 262 Parquet Adhesive, firm-elastic, and is suitable for laying strip parquet and solid wood planks up to max. 18 cm in width and multi-layer parquet as of 90 cm in length indoors.	15 M2
 WAKOL measuring bucket (+ lid)	127473	Transparent measuring bucket for easily measuring out water for WAKOL levelling compounds.	11 KG
 WAKOL mixing bucket	100835	Mixing bucket with firm rim and handle for mixing WAKOL levelling compounds.	30L
 LOBA roller for water-based lacquers	100509	Roller for the application of LOBA waterbased lacquers. Ensures the recommended quantity (approx. 120g/m ²). No roller frame included.	1 piece
 LOBA bucket for lacquers	100830	Bucket with lid and measure scale.	1 piece
 LOBA mixing jug for lacquers	101106	Mixing jug with scale for the measurement of partial quantities of LOBA 2K waterbased lacquers.	1 piece
 LOBA inliner bags	100831	PE inliner bags for the LOBA bucket for lacquers.	25 pieces
 LOBA spray mop	138808	Practical mop with integrated spray system specially developed for the cleaning of parquet, hardwood and cork floors. Fast and easy cleaning, no bucket required.	1 set
 LOBA spray mop cover	138811	Microfibre mop cover for LOBAHOME SprayMop and Mop. Washable at 60°C.	1 single cloth

lecol[®]



Alex Jeakins

T +44 (0)7496282829
E alexjeakins@lecoluk.com



Duncan Conlan

T +44 (0)7534941817
E duncanconlan@lecoluk.com



Fraser McArthur

T +44 (0)7956134481
E frasermcarthur@lecoluk.com



01.2026

Lecol UK // www.lecoluk.com // sales@lecoluk.com

